アウトドロップ 2+

OUTDROP 2+が16SC/APCをパッチングし、1/4回転で固定。

Aginode Ref: 10273312

- FTTHネットワーク用光アクセスポイント
- マイクロバンドルおよびルースチューブケーブルとの互換性
- ケーブルの要素をブロックする貯蔵タンク（ピストン防止）
- 見た目のインパクトが少ない堅牢な製品
- 最大16個のSCアダプターを接続可能
- スプリッターの統合

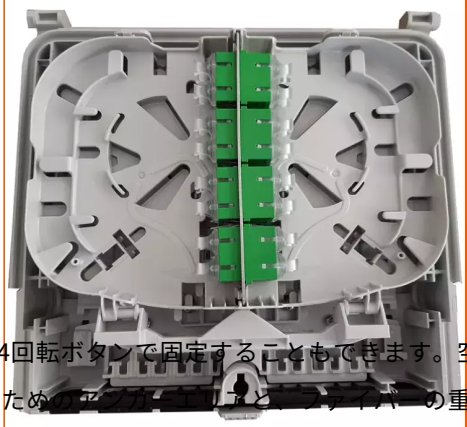

OUTDROPボックスは、サブスクライバーケーブルの空中展開用に設計されています。また、1/4回転ボタンで固定することもできます。空
マイクロバンドルやルースケーブルに対応するオーガナイザートレイには、ケーブルを固定するための[illegible]と、ファイバーの重

ファイバー管理

ファイバーはスパイスカセットで管理されます。カセットは連結式で、スプライスに素早く簡単にアクセスできます。
このボックスは、異なるバージョンのカセットやオーガナイザーを使用でき、最大72個のスプライスを収容できます。すべてのカセットに
SFMオーガナイザーとカセットを使用すると、接続中のファイバー、輸送中のファイバー、保留中のファイバーを区別してベアファイバー
パッチ・バージョンでは、24個のスプライスと16個のSCアダプタに制限されています。

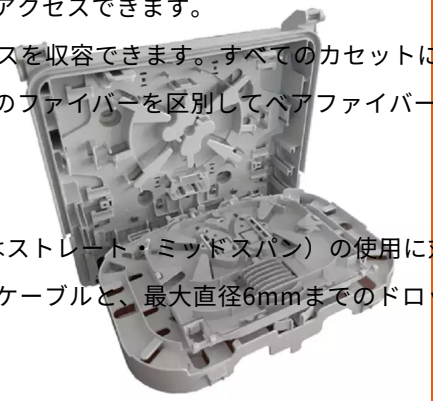

ケーブル構成

本製品は、2つのラテラル・ポート（オプション）により、ミッドスパン・ケーブル（バットまたはストレート・ミッドスパン）の使用に対
ラバーシール付きポートは、外部使用での保護等級（IP55）を保証します。最大直径14mmまでのケーブルと、最大直径6mmまでのドロ

STANDARDS

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

OUTDROP 2+が16SC/APCをパッチングし、1/4回転で固定。

Characteristics

Construction characteristics	
Colour	Light grey RAL 7035
Material	Thermoplastic
Dimensional characteristics	
Height	78 mm
Width	236 mm
Length	247 mm
Max. number of cassettes	1
Splice number	30
Number of branched cables	16
Maximum number of adaptators	16
Diameter main cable	4...14 mm
Diameter branch cable	4...6 mm
Mechanical characteristics	
IK Rating	9
Usage characteristics	
Operating temperature, range	-40...65 °C
Midspan	Yes
Minimum static operating bending radius	30 mm
Locking system	Triangle
U.V resistance	Yes
Packaging	Box
Installation type	Outdoor
RoHS compliant	Yes
Watertightness	IP 55

ドキュメンテーション

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

OUTDROP splicing 72OF for G657A2 fibre - instructions (FR/EN) pdf — 1.77 MB　ダウンロード

OUTDROP splicing 72OF SFM - instructions (FR/EN) pdf — 2.12 MB　ダウンロード

OUTDROP splicing 48OF - instructions (FR/EN) pdf — 1.55 MB　ダウンロード

OUTDROP patching - Version with plastic organiser - instructions (FR/EN) pdf — 1.34 MB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.