

WLB-Med : Indoor Wall Box

WLB-MED - STANDARD

Aginode Ref: NWLB.M010DU.W

The WLB-Med is a compact and efficient fiber management solution designed for passive infrastructure cabling and other indoor fiber networks. It ensures secure connectivity, high-density fiber management, and easy maintenance.

Key Features


- **10 SC ports** for high-density connectivity
- **Two internal cassettes** for organized fiber routing
- **Wall-mounted, space-saving design**
- **IP42-rated enclosure** for dust and moisture protection
- **Quick-access cover** for simplified maintenance

Product Consistency

Standard : Ready for custom configurations.

Applications

- Passive fiber optic infrastructure networks(GPON & P2P, FTTO...cet)
- Wall-mounted fiber distribution point for structured cabling

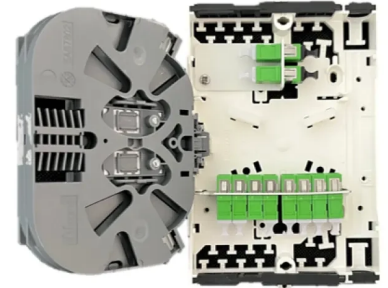

STANDARDS

Aginode specification

WLB-Med - Standard

Characteristics

Construction characteristics

| | |
|------------------|------------|
| Fiber optic type | SM (G.652) |
|------------------|------------|

Dimensional characteristics

| | |
|--------|--------|
| Depth | 42 mm |
| Height | 180 mm |
| Width | 125 mm |

Mechanical characteristics

| | |
|-----------|---|
| IK Rating | 8 |
|-----------|---|

Usage characteristics

| | |
|------------------------------|-------------|
| Fire resistant | UL 94 V0 |
| Operating temperature, range | -10...60 °C |
| Watertightness | IP44 |