LIGHTDROP

LIGHTDROP L - SPLITTER 1:8

Aginode Ref: LDSFLA08HQHQNA01SC00NASTNANANA

Featuring:

- 8 Hardened Quarter Turn (FastConnect compatible) front ports for customer connections (Ports 1 to 8).
- 1 Hardened Quarter Turn (FastConnect compatible) bottom port for splitter IN.
- Mounting bracket options for overlenght cable storage.






Aginode specification

Terminal max. attenuation*:

Splitter ratio	Splitter port
1:8	10.70 dB

*Total terminal attenuation, including insertion losses from pre-connectorization.

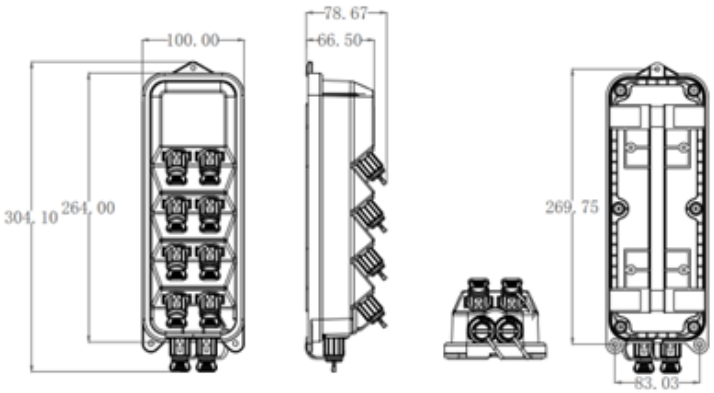

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LIGHTDROP L - Splitter 1:8

Characteristics

Construction characteristics	
Colour	Black
Material	PP
Mechanical characteristics	
IK Rating	8
Usage characteristics	
Installation type	Outdoor
Operating temperature, range	-40...65 °C
Packaging	Box
RoHS compliant	Yes
U.V resistance	Yes
Watertightness	IP 68

ABS 1642 Ind.A .pdf pdf — 2.5 MB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.