

LIGHTDROP

LIGHTDROP L - SPLITTER 1:8

Aginode Ref: LDSFLA08HQQNA01SC00NASTNANANA


Featuring:

- 8 Hardened Quarter Turn (FastConnect compatible) front ports for customer connections (Ports 1 to 8).
- 1 Hardened Quarter Turn (FastConnect compatible) bottom port for splitter IN.
- Mounting bracket options for overlenght cable storage.

Terminal max. attenuation*:

Splitter ratio	Splitter port
1:8	10.70 dB

*Total terminal attenuation, including insertion losses from pre-connectorization.

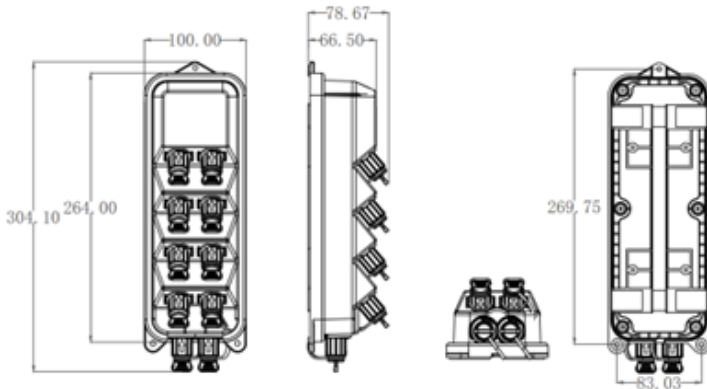

Aginode specification

LIGHTDROP L - Splitter 1:8

Characteristics

Construction characteristics

Colour	Black
Material	PP

Mechanical characteristics

IK Rating	8
-----------	---

Usage characteristics

Installation type	Outdoor
Operating temperature, range	-40...65 °C
Packaging	Box
RoHS compliant	Yes
U.V resistance	Yes
Watertightness	IP 68

ABS 1642 Ind.A .pdf pdf — 2.5 MB [ダウンロード ↓](#)