
LANmark-OF UC 屋外用 PE 2～24コア APAC地域

LANMARK-OF UC PE 6コア SM G.657.A1 ブラック APAC地域

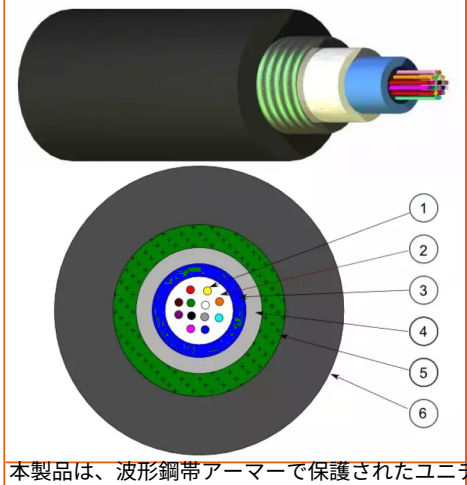

Aginode Ref: N17A.182

ダクト内や地中直埋に最適

- 波形鋼帯アーマー
- ゲル充填チューブ
- マルチモードおよびシングルモードファイバーに対応
- 齧歯類からの保護機能を備えています
- 外被材はHDPE

概要と用途

Aginode LANmark-OF
UC光ファイバーケーブルは、屋外用途向けに設計されています。その構造は、屋外での直埋設に適しています。本製品は、波形鋼帯アーマーで保護されたユニ
ケーブルの外被にはHDPEが使用されています。

構造

断面図の凡例：

1. 光ファイバー（250 µm）
2. 防水ゲル充填
3. ルーズチューブ
4. ガラスヤーン
5. 波形鋼帯アーマー
6. 耐紫外線添加剤を配合したHDPE外被

特徴

- スプライシングによる終端処理用に設計
- 中央にルーズチューブを配置した設計
- 波形鋼製保護層
- 防水構造で、耐紫外線性を備えています
- マルチモードおよびシングルモードファイバーに対応
- 2～24ファイバーのラインナップ

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF UC PE 6コア SM G.657.A1 ブラック APAC地域

Characteristics

Construction characteristics	
Outer sheath	HDPE
Sheath colour	Black
Armour type	Galvanized steel tapes
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	1300 N
Crush resistance (IEC 60794-1-E3)	300 N/cm
Usage characteristics	
Storage temperature, range	-30...60 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	164.0 mm
Minimum static operating bending radius	82 mm
Ambient installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.