LANmark-OF スプライスカセット

LANMARK-OF 12/24用融着接続トレイ（熱収縮チューブによる保護付き）

Aginode Ref: N890L.095

- スプライス管理用スプライスカセット
- 熱収縮プロテクター
- 小型スプライスカセット



融着接続技術を用いたケーブルの終端処理のための、パッチパネル用アクセサリーのシリーズ。

このカセットは、融着接続部を保護し、所定の位置に固定します。

熱収縮プロテクター付きスプライスカセットは、250 µmおよび900
µmの被覆ファイバーの両方に使用できます。したがって、これらのカセットは、LANmark-OFのタイトバッファ、ルースチューブ、およびマイクロバンドルケーブルに対応しています。
熱収縮プロテクターを使用したスプライシングは、LANmark-OF
Maxistrip および Tight Buffer ピグテールの両方に使用できます。

これらのカセットには 12 箇所のスプライス位置があり、12
本または 24 本のファイバーを収容できます。

STANDARDS


ISO/IEC 11801

Aginodeファイバーパネルには最大4つのスプライスカセットを収納でき、カバー（N890L.097）が必要なのは最上部のスプライスカセッ

このカセット（N890L.095）は 12
箇所のスプライス位置を備え、12 本または 24
本のファイバーを収容でき、LANmark-OF スナップインパネル
（N441.303およびN441.304）およびLANmark-OF
ZDボックス（N521.630およびN521.612）と互換性があります。

設置寸法は以下を参照してください：

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

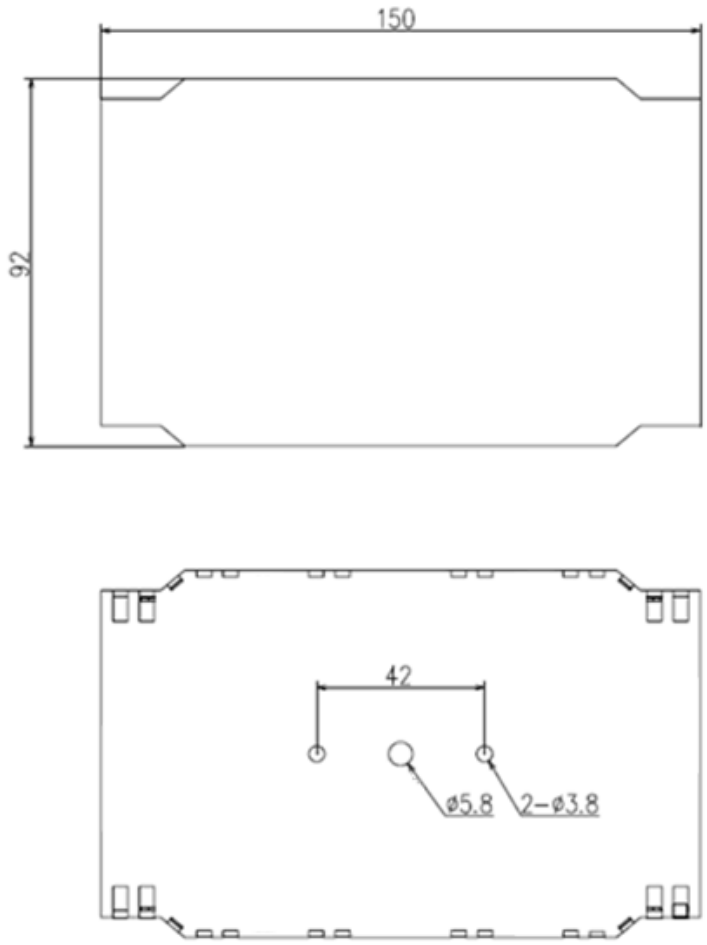

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.