
LANmark-OF Micro-Bundle Universal (6F-12F) Dca

- Micro-Bundle Universal optical fibre cable
- Indoor cable and outdoor installation in a duct
- Fully waterproof and rodent retardant
- Designed for splicing with pigtails
- 6-12 fibres and available in all fibre grades

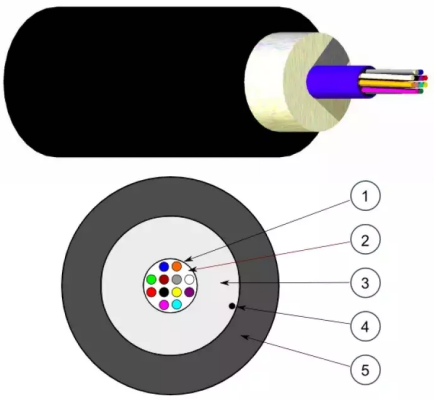

STANDARDS

ISO/IEC 11801

Description and Application

The new Micro-Bundle technology from Aginode allows to manufacture a very flexible and small tube that is the central part of the new “LANmark-OF Micro-Bundle Universal” cable design. This results in a small, flexible, but mechanical robust cable. The central tube contains up till 12 fibres with a fibre diameter of 250 um. Termination of these fibres is done with splicing with pigtails.

The small bending radius of the Micro-Bundle makes the cable easy to arrange in patch panels and for installations in data centres and backbones.

The watertight glass yarns and the very limited amount of gel inside the tube makes this cable design watertight and suitable for installation outdoor in a duct by pulling.

The fire performance of the LANmark-OF Micro-Bundle Universal allows indoor installation as well. Since there is no drip effect of the very limited amount of gel the cable is optimised for both horizontal and vertical installations.

Construction

1. Central Micro-Bundle
2. Optical fibres (250 µm)
3. Reinforced watertight glass yarns
4. Ripcord
5. LSZH outer jacket with UV resistant additive

Characteristics

- Indoor cable for horizontal and vertical installation

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- Outdoor cable for installation in a duct
- Designed for termination by splicing
- Central Micro-Bundle design for easy installation
- All dielectric
- Waterproof structure, Rodent retardant and UV-resistant
- Flame retardant (IEC 60332-1) and fire retardant (IEC 60332-3)
- Available in all fibre grades and from 4-12 fibres
- Gas Toxicity (IEC 60754) and Smoke Density (IEC61034)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF Micro-Bundle Universal (6F-12F) Dca

CHARACTERISTICS

구조적 특성	
Fiber optic type	SM (G657.A1)
치수	
Number of optical fibres	12
기계적 특성	
Mechanical resistance to impacts	1 impact of 3 N.m
Maximum operating pulling force	700 N
Maximum pulling force (IEC 60794-1-2-E1)	2200 N
Crush resistance (IEC 60794-1-E3)	200 N/cm
사용 특성	
操作温度范围	-20...60 °C
Fire retardant	IEC 60332-3
Minimum dynamic operating bending radius	60.0 mm
Minimum static operating bending radius	60 mm
난연	IEC 60332-1
Storage temperature, range	-40...60 °C
Ambient installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	이름
	N164.MBUN12	-	LANmark-OF Micro-Bundle Universal 12x Singlemode 9/125 OS2 LSZH Dca s1d0a1 Black
	N167.MBUN06	-	LANmark-OF Micro-Bundle Universal 6x Multimode 50/125 OM4 LSZH Dca s1d0a1 Black
	N167.MBUN12	-	LANmark-OF Micro-Bundle Universal 12x Multimode 50/125 OM4 LSZH Dca s1d0a1 Black

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.