OPTEASTAR 2+ 19'' 캐비닛 액세서리

600+800x300 세트를 사용하는 고밀도 또는 600+300x300 세트를 사용하는 높은 모듈성의 오픈 랙 구조
높이 45U

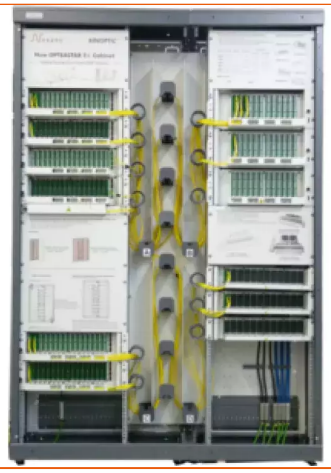

OPTEASTAR 2+ 캐비닛은 광선로 네트워크(WAN, SAN, LAN 또는 FTTx)의 다양한 상호 연결 노드에 위치하여 중앙 사무실 또는 POP(Point Of Presence)에 스플리터를 통합하여 지점 간 또는 PON을 구성하거나 많은 수의 가입자가 있는 건물 지하에서 라이저 상호화를 위해 배치할 수 있습니다.

이러한 복수의 솔루션에 대응하기 위해 모든 유형의 케이블에 대해 고밀도 연결을 허용하는 최적화된 모듈성을 기반으로 설계되었습니다:

- 프레임 간 패치
- 상호 연결
- 교차 연결

OPTEASTAR 2+ 캐비닛은 모든 유형의 19인치 광 모듈(서브랙 제외)과 호환됩니다. 필요에 따라 최대 2200mm의 다양한 높이, 표준 깊이 300mm, 600, 900 또는 800mm에 최적화된 폭으로 제공됩니다.

이 OPTEASTAR 2+ 버전은 또한 대형 사이트의 경우 여러 개의 캐비닛을 나란히 또는 연속적으로 조립할 수 있으며 오픈 랙 사용이 가능합니다. 캐비닛 분해가 매우 쉬우며, 접근이 어려운 경우(계단) 필요에 따라 키트 배송이 가능합니다.

구성

OPTEASTAR 2+ 모듈형 캐비닛은 도어, 루프, 패널이 없는 오픈랙 구성에 최적화되어 있습니다. 구조는 단일 구성과 동일하지만 19'' 오픈랙과 다양한 액세서리를 조립하여 구성합니다:

- 600+800x300 세트, 2개의 랙과 W 중앙 코일링 영역 포함
- 랙 1개와 왼쪽 코일링 영역으로 800x300을 설정하여 행을 마무리합니다

또는

- 600+300+600x300 세트, 2개의 랙과 W 중앙 코일링 영역 포함
- 랙 1개로 600x300 설정
- W 코일링 영역으로 300x300 설정

및

- 탈착식 측면 패널 2개 세트
- 후면 패널
- 전체 지붕 또는 브러시 포함

STANDARDS

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

구성에 따라 구성이 조정됩니다.

케이블 연결

광케이블 인입은 받침대 및/또는 루프에 의해 수행됩니다. 케이블 클램핑 및 팬아웃은 각 캐비닛의 하부 및/또는 상부에서도 이루어집니다.

고정

캐비닛은 벽, 바닥, 뒷면 또는 나란히 고정할 수 있습니다.

예시, 3세트 600+800x300 구성



모듈 뒤의 케이블 관리

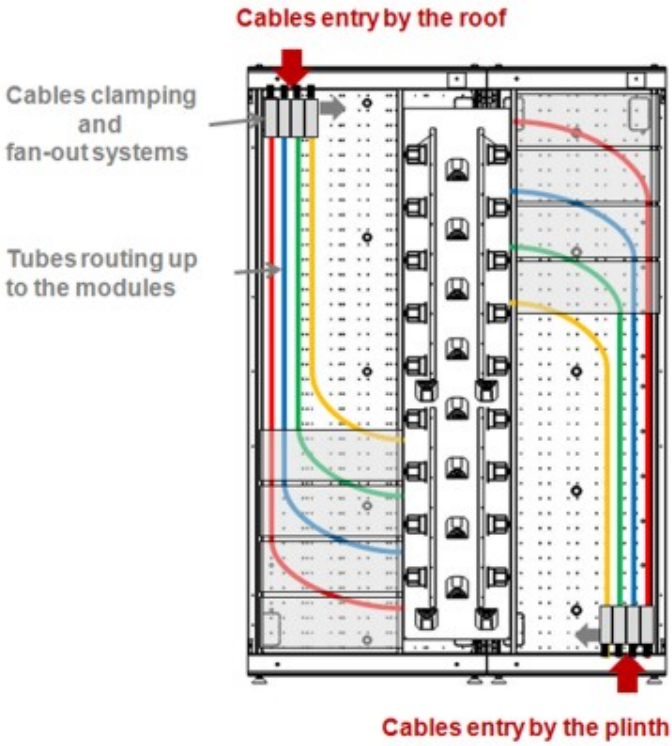

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

W 코일링 원리

##이미지:92558:가운데##

모든 패치 구성에 대해 하나의 길이의 패치 코드만 사용합니다.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

OPTEASTAR 2+ 19'' 캐비닛 액세서리

CHARACTERISTICS

구조적 특성	
색상	회색
Material	스틸
치수	
Depth	300 mm
Width	1400 mm
Heightunit	45 U
기계적 특성	
IK Rating	10
사용 특성	
操作温度范围	-10...60 °C
Minimum static operating bending radius	30 mm
Packaging	Pallet
Installation type	Indoor

Resources

케이블 6/12/24 튜브용 클램핑 장치

ABS 1504 Ind.D.pdf pdf — 1.97 MB 다운로드

판매 및 배송 정보

포장: 팔레트당 2세트 800x1200

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	이름	Heightunit
	10267741	-	2 Side panels 45U with fast closing	45 (U)
	10267873	-	Ground kit for 2 side panels	45 (U)
	10267740	-	2 Side panels 42U with fast closing	42 (U)
	10267997	-	Sets 300+600x300 45U with rack 19'' on the right	45 (U)
	10267998	-	Sets 300+600x300 42U with rack 19'' on the right	42 (U)
	10267999	-	Sets 600+300x300 45U with rack 19'' on the left	45 (U)
	10268000	-	Sets 600+300x300 42U with rack 19'' on the left	42 (U)
	10268001	-	Sets 600+300+600x300 42U with 2 racks 19'' on the ends	42 (U)
	10268002	-	Sets 600+300+600x300 45U with 2 racks 19'' on the ends	45 (U)
	10268003	-	Sets 600+800x300 42U with 2 racks 19'' on the ends	42 (U)
	10268084	-	Sets 600+800x300 45U with 2 racks 19'' on the ends	45 (U)
	10268085	-	Set 800x300 42U with rack 19'' on the right	42 (U)
	10268086	-	Set 800x300 45U with rack 19'' on the right	45 (U)
	10268087	-	Set 800x300 42U with rack 19'' on the left	42 (U)
	10268088	-	Set 800x300 45U with rack 19'' on the left	45 (U)
	10267734	-	Roof 800x300 with brushes	45 (U)
	10267735	-	Roof 600x300 with brushes	45 (U)
	10267736	-	Roof 300x300 with brushes	45 (U)
	10267737	-	Full roof 800x300	45 (U)
	10267738	-	Full roof 600x300	45 (U)
	10267739	-	Full roof 300x300	45 (U)

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.