

Drop - Unibundle cables Cca

Unibundle cable from 2 to 12 fibres

This unibundle cable is designed for indoor/outdoor installation.

This cable has an outstanding fire behaviour.

This cable can be operated under a large temperature range.

Design

The SC LSZH cable has a central bundle with maximum 12 fibres inside. The design is reinforced by a layer of watertight glass yarns and a LSZH* sheath.

Fibre type

The SC LSZH cable is available with singlemode and multimode fibres.


Technical performances

The unibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these others colours could generate colour fading.

* LSZH: Low Smoke Zero Halogen.

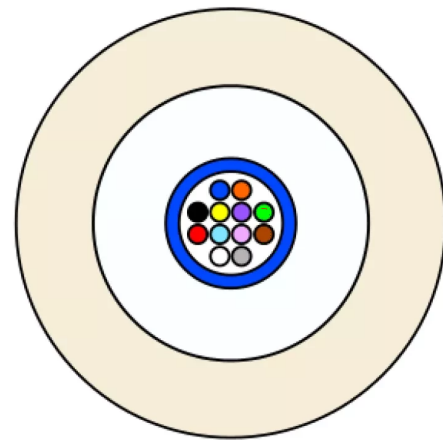

STANDARDS

EN 50399
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C2

Drop - Unibundle cables Cca

CHARACTERISTICS

구조적 특성

색상	하얀색
Fiber optic type	SM (G657.A2)
피복	저연 할로겐 프리
Halogen free	IEC 60754-1
Material used for longitudinal water tightness	Watertight glass yarns
Metal free	Yes
구조	싱글 번들 튜브
Additional strength member	유리사

치수

Number of optical fibres	4
Cable Diameter, range	3.9...4.5 mm
Number of optical fibres, range	1...12

기계적 특성

Mechanical resistance to impacts	10 impacts of 3 N.m
Crush resistance (IEC 60794-1-E3)	200 N/cm
Maximum installation tension	750 N

사용 특성

Rodent protection	Glass yarns
操作温度范围	-30...60 °C
Fire retardant	IEC 60332-3
Minimum static operating bending radius	15 mm
난연	IEC 60332-1
연기밀도	IEC 61034-2
U.V resistance	Very good
Storage temperature, range	-40...60 °C
Laying operation bending radius	15 mm
Installation type	Indoor/Outdoor
Installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

판매 및 배송 정보

Standard Marking

Aginode - FIBRE OPTIC CABLE - SC LSZH Cca s1a d1 a1 SPXXXX - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number

Product list

	Aginode ref.	Country ref.	이름	색상	Fiber optic type	Number of optical fibres
☎	10203034	-	SC LSZH 1xSM G657A2 WT SP1766	하얀색	SM (G657.A2)	1
☎	10201442	-	SC LSZH 4xSM G657A2 WT SP1249	하얀색	SM (G657.A2)	4
☎		-	SC LSZH 4xSM G657A1 SP1766 WT	하얀색	SM (G657.A1)	4
☎	10512515	-	SC-B2 LSZH 1xSM G657A2 WT SP1766	하얀색	SM (G657.A2)	1
☎	10512518	-	SC-cca LSZH 1xSM G657A2 WT SP1802	하얀색	SM (G657.A2)	4
☎		-	SC LSZH 12xSM G657A2 WT SP1249	하얀색	SM (G657.A2)	12
☎		-	SC LSZH 2xSM G657A2 WT SP1249	하얀색	SM (G657.A2)	2
☎		-	SC LSZH 2xSM G657A2 WT SP1802	하얀색	SM (G657.A2)	2
☎		-	SC LSZH 2xSM G657A1 SP1766 WT	하얀색	SM (G657.A1)	2
☎	10212292	-	SC LSZH 2xSM G657A2 WT SP1766	하얀색	SM (G657.A2)	2
☎		-	SC LSZH 6xSM G657A2 WT SP1249	하얀색	SM (G657.A2)	6
☎		-	SC LSZH 12xSM G657A1 SP1766 YE	노란색	SM (G657.A1)	12

☎ = Make to order, 📦 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.