B-LITE LT - 마이크로 루즈 튜브 케이블



이 컴팩트한 케이블은 액세스, 배전, 도시 네트워크 및 FTTx 애플리케이션에 사용됩니다.
마이크로 도관 내부에 블로잉하여 신속하게 설치할 수 있도록 설계되었습니다.

특징 및 애플리케이션

- 외부 케이싱의 낮은 마찰 계수 덕분에 장거리 송풍 가능
- 강성과 유연성 사이의 균형이 잘 맞음
- 광케이블에 대한 접근이 간편하여 설치가 쉬움
- 중앙 캐리어 보강
- 모든 유전체 설계
- 방수 구조

구조

- 실링 젤리와 컬러 파이버로 채워진 마이크로루즈 튜브
- 중앙 보강 요소
- 마찰 계수가 매우 낮은 외부 외피

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.


B-LITE LT - 마이크로 루즈 튜브 케이블

CHARACTERISTICS

구조적 특성	
구조	멀티 번들 튜브
Fiber optic type	SM
Metal free	Yes
피복	HDPE
Strength member	FRP
치수	
Nominal outer diameter (mm)	5.3 mm
Number of optical fibres	48
Number of tubes	4
사용 특성	
Ambient installation temperature, range	0...40 °C
Installation type	Outdoor - Microduct blowable
Storage temperature, range	-40...70 °C

Resources

라이브러리 문서

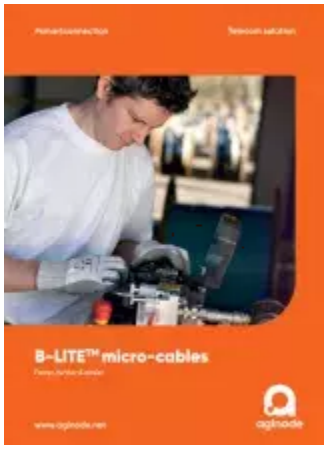

PDF - 4.16 MB
B-LITE™ micro-cables
다운로드

판매 및 배송 정보

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

표준 마킹

Aginode - 광케이블 - SPxxxx - XX*YY - FB - TN - 미터법

XX = 광케이블 수
YY = 광케이블 유형
FB = 벨기에 프레임에서 생산됨
TN = 추적성 번호

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	이름	Fiber optic type	Nominal outer diameter (mm)	Number of optical fibres	Number of tubes	Precision of diameter
	Microcable 4x12SM SP2003 BLite LT	-	Microcable 4x12SM SP2003	SM	5.3 (mm)	48	4	
	Microcable 2x12SM SP2003 BLite LT	-	Microcable 2x12SM SP2003	SM (G657.A1)	5.3 (mm)	24	2	
	Microcable 1x12SM SP2003 BLite LT	-	Microcable 1x12SM SP2003	SM (G657.A1)	5.3 (mm)	12	1	
	Microcable 12x12SM SP1913 BLite LT	-	Microcable 12x12SM SP1913 BLite LT	SM	7.6 (mm)	144	12	
	Microcable 24x12SM SP1954 BLite LT	-	Microcable 24x12SM SP1954	SM (G657.A1)	9.3 (mm)	288	24	
	Microcable 8x24SM SM 200µm SP1895 BLite LT	-	마이크로케이블 8x24SM SM 200µm SP1895 BLite LT	G657A1 - 200 µm	6.55 (mm)	192	8	
	10571489	-	Microcable 8x12SM SP2004	SM	6.2 (mm)	96	8	
	10571488	-	Microcable 6x12SM SP2003	SM	5.3 (mm)	72	6	
	Microcable 12x12SM 200µm SP2007 BLite LT	-	Microcable 12x12SM 200µm SP2007	G657A1 - 200 µm	6.6 (mm)	144	12	
	Microcable 6x12SM SP990	-	Microcable 6x12SM SP990	SM	5.7 (mm)	72	6	
	B-Lite LT 200 8x24SM G657A1LL SP1895 COLT	-	Nanocable 8x24SM SM 200µm SP1895	G657A1 - 200µm Low Loss	6.55 (mm)	192	8	
	SP2008	-	Microcable 6X24 G.657.A1 200µm SP2008 BLite LT	G657A1 - 200 µm	5.7 (mm)	144	6	

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.