

Duct - Unitube cables

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed in outdoor installations.

Characteristics & Applications


- Easy installation due to the friction properties of the outer sheath
- Robust design
- Waterproof structure
- Halogen free

Fibre type

The cable is available with different fibre types.

Construction

- Jelly filled tube
- Reinforcement elements
- Low friction outer sheath



STANDARDS

IEC 60794

Duct - Unitube cables

CHARACTERISTICS

구조적 특성

Fiber optic type SM

구조 Unitube

치수

Number of tubes 1

Number of optical fibres 24

사용 특성


Storage temperature, range -40...70 °C

Installation type Outdoor - Duct

Installation temperature, range 0...40 °C

Bending factor when laying 20 (xD)

Resources

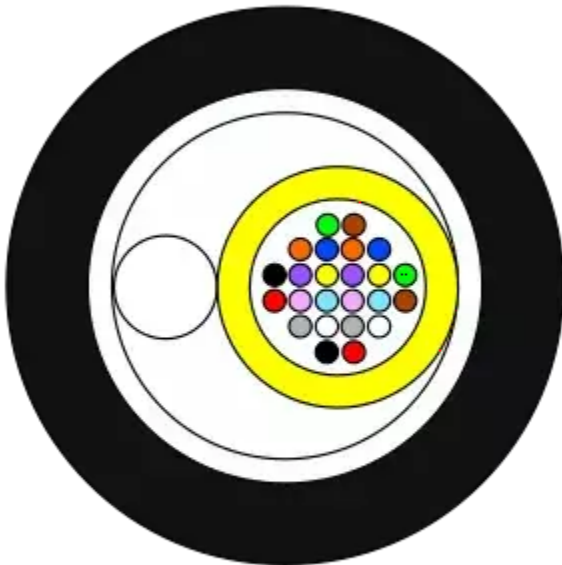

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

판매 및 배송 정보

Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count



YY = Fibre Type



FB = Frameries, Belgium (manufacturing place)

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	이름	Armour type	Fiber optic type	Number of optical fibres	Number of tubes
	-	Unitube Cable 1x24SM SP1647	유리 섬유사	SM	24	1
 10231297	-	Unitube Cable 1x12SM SP1647	유리 섬유사	SM (G.652D)	12	1

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.