

LANmark-OF UG Indoor/Outdoor PE 2-24C APAC Region

- Indoor / Outdoor in ducts
- Glass yarns protection and HDPE jacket
- Available up to 24 fibers
- Watertight and rodent protection
- Bending Insensitive Fibers for OM3,OM4 cables

Application

The construction is suitable for use indoor and outdoor in ducts.

It is surrounded by glass yarns and providing rodent protection.

The cable has a HDPE outer jacket.

The loose tube design has a capacity of up to 24 fibers.

Diameter of the fibres


is 250 um. Termination of these fibres is done with splicing of pigtails.

The cable is watertight due to the gel in the loose tube and the watertight glass yarns.

Construction

Legend accompanying the cross section drawing:

1. Optical fibres (250um)
2. Gel
3. Loose tube
4. Reinforced watertight glass yarns
5. HDPE outer jacket

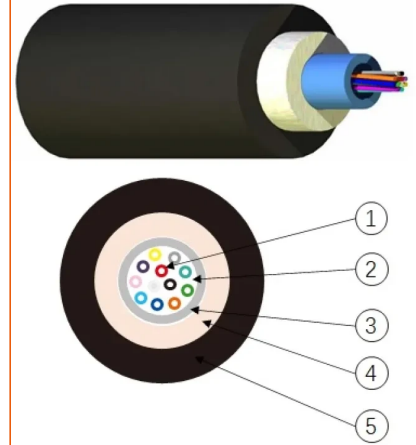

STANDARDS

ANSI/TIA-568-C.3

IEC 60793-2-10

ISO/IEC 11801

LANmark-OF UG Indoor/Outdoor PE 2-24C APAC Region

CHARACTERISTICS

구조적 특성

Fiber optic type	OM3 50/125
------------------	------------

치수

외경	7.2 mm
----	--------

Weight	43 g
--------	------

Number of optical fibres	4
--------------------------	---

기계적 특성

Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
---------------------------------------------------	----------------------

Crush resistance (IEC 60794-1-E3)	2000 N/100mm
-----------------------------------	--------------

Maximum pulling force (IEC 60794-1-2-E1)	1700 N
------------------------------------------	--------

사용 특성

操作温度范围	-20...60 °C
--------	-------------

Minimum dynamic operating bending radius	144.0 mm
------------------------------------------	----------

Minimum static operating bending radius	72 mm
-----------------------------------------	-------

Storage temperature, range	-20...70 °C
----------------------------	-------------

Installation temperature, range	0...40 °C
---------------------------------	-----------

Product list

	Aginode ref.	Country ref.	이름
☎	N175.841	-	LANmark-OF UG 4 x Multimode 50/125 BI OM3 PE Black
☎	N175.842	-	LANmark-OF UG 6 x Multimode 50/125 BI OM3 PE Black
☎	N175.843	-	LANmark-OF UG 8 x Multimode 50/125 BI OM3 PE Black
☎	N175.845	-	LANmark-OF UG 12 x Multimode 50/125 BI OM3 PE Black
☎	N175.851	-	LANmark-OF UG 24 x Multimode 50/125 BI OM3 PE Black
☎	N177.840	-	LANmark-OF UG 2 x Multimode 50/125 BI OM4 PE Black
☎	N177.841	-	LANmark-OF UG 4 x Multimode 50/125 BI OM4 PE Black
☎	N177.842	-	LANmark-OF UG 6 x Multimode 50/125 BI OM4 PE Black
☎	N177.843	-	LANmark-OF UG 8 x Multimode 50/125 BI OM4 PE Black
☎	N177.845	-	LANmark-OF UG 12 x Multimode 50/125 BI OM4 PE Black
☎	N177.851	-	LANmark-OF UG 24 x Multimode 50/125 BI OM4 PE Black
☎	N174.840	-	LANmark-OF UG 2 x Singlemode 9/125 G.652.D PE Black
☎	N174.841	-	LANmark-OF UG 4 x Singlemode 9/125 G.652.D PE Black
☎	N174.842	-	LANmark-OF UG 6 x Singlemode 9/125 G.652.D PE Black
☎	N174.843	-	LANmark-OF UG 8 x Singlemode 9/125 G.652.D PE Black
☎	N174.845	-	LANmark-OF UG 12 x Singlemode 9/125 G.652.D PE Black
☎	N174.851	-	LANmark-OF UG 24 x Singlemode 9/125 G.652.D PE Black
☎	N175.840	-	LANmark-OF UG 2 x Multimode 50/125 BI OM3 PE Black

☎ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.