
LANmark-OF Bow 광섬유 케이블 1-2C

- 바닥 배선에 가장 적합
- 굽힘 반경이 작은 광섬유
- 노치 구조로 코어 제거가 용이
- 난연성: IEC 60332-1 및 IEC 60332-3C

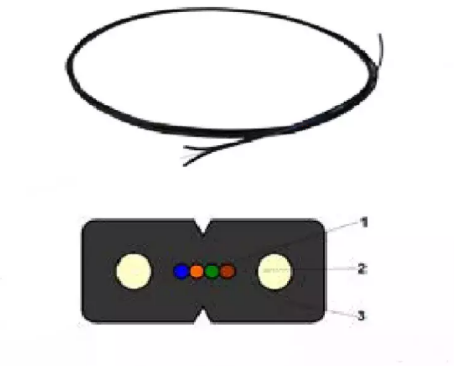

특징

특수한 저굴곡 민감도 광섬유는 높은 대역폭과 뛰어난 통신 전송 특성을 제공합니다.

단일모드 G657A2 성능: IEC60793-2-10, 하위 유형 B6a.2 준수

독창적인 플루트 설계로 피복 제거 및 접합이 용이하여 설치 및 유지보수가 간편합니다.

구조

단면도 설명:

1. 광섬유
2. FRP
3. LSZH 소재의 외부 피복

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF Bow 광섬유 케이블 1-2C

CHARACTERISTICS

구조적 특성	
Fiber optic type	SM (G657.A2)
색상	검은색
치수	
Width	3 mm
Weight	8 g
Height	2 mm
기계적 특성	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	80 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Transmission characteristics	
Attenuation, max. 1310 nm (cabled)	0.5 dB/1000m
Attenuation, max. 1550 nm (cabled)	0.4 dB/1000m
사용 특성	
Storage temperature, range	-20...60 °C
操作温度范围	-20...60 °C
Minimum static operating bending radius	15 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	이름
	N174CH.002	-	FTTH 보우형 드롭 케이블 2F LSZH, 검정색
	N174CH.001	-	FTTH 보우형 드롭 케이블 1F LSZH, 검정색
	N174CH.004	-	FTTH 보우형 드롭 케이블 4F LSZH, 검정색

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.