
B-LITE 3 - 마이크로 번들 케이블

이 컴팩트한 케이블은 액세스, 배전, 도시 네트워크 및 FTTx 애플리케이션에 사용되며, 마이크로 덕트를 불어넣어 빠르게 설치할 수 있도록 설계되었습니다.



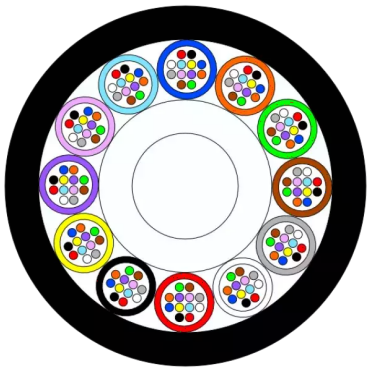

특성 및 응용 분야

- 외부 피복의 우수한 마찰 특성으로 인한 높은 분사 거리
- 유연성과 강성 사이의 적절한 균형
- 중간 스팬 접근이 가능하여 설치가 용이함
- 손쉬운 마이크로 번들 스트립 가능성
- 중앙 강도 부재 보강
- 모든 유전체 설계
- 방수 구조

구조

- 컬러 섬유가 포함된 젤리 충전 마이크로 번들
- 중앙 FRP 강도 부재
- 마찰이 매우 적은 외부 외피

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

B-LITE 3 - 마이크로 번들 케이블

CHARACTERISTICS

구조적 특성	
색상	검은색
Fiber optic type	SM
피복	PA
Metal free	Yes
Strength member	FRP
구조	멀티 번들 튜브
치수	
Number of tubes	12
Number of optical fibres	144
Nominal outer diameter (mm)	7.4 mm
사용 특성	
操作温度范围	-30...70 °C
Storage temperature, range	-40...70 °C
Installation type	Outdoor - Microduct blowable
Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)

Resources

문서

Leaflet - B-LITE3 Microcables pdf — 2.83 MB 다운로드

판매 및 배송 정보

표준 마킹

Aginode - B-Lite^3 - SPxxxx - 광케이블 - XX*YY - FB - TN - 미터법

XX = 광케이블 개수
YY = 광케이블 유형
FB = 벨기에 프레임워크에서 생산됨
TN = 추적성 번호

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	이름	피복	Fiber optic type	Nominal outer diameter (mm)	Number of optical fibres	Number of tubes
	Microcable 12x12SM SP1904 B-LITE^3	-	마이크로케이블 12x12SM SP1904 B-LITE^{33}	PA	SM	7.4 (mm)	144	12
	SP1896	-	마이크로케이블 6x12SM SP1896 B-LITE^{33}	PA	SM	4.7 (mm)	72	6
	Microcable 8x12SM SP1903 B-LITE^3	-	마이크로케이블 8x12SM SP1903 B-LITE^{33}	PA	SM	5.7 (mm)	96	8
	SP1940	-	마이크로케이블 24x12SM SP1940 B-LITE^{33}	PA	SM	8.7 (mm)	288	24
	SP1902	-	마이크로케이블 6x4SM SP1902 B-LITE^{33}	PA	SM	3.5 (mm)	24	6
	SP1896	-	마이크로케이블 4x12SM SP1896 B-LITE^{33}	PA	SM	4.7 (mm)	48	4
	SP1956	-	마이크로케이블 6x24SM SP1956 B-LITE^3	PA	G657A1 - 200 µm	5.2 (mm)	144	6
	10567921	-	마이크로케이블 8x12SM SP1903 B-LITE^{33}	PA	SM	5.7 (mm)	96	8
	14500145	-	마이크로케이블 12x12SM SP1904 B-LITE^{33}	PA	SM	7.4 (mm)	144	12
	10569678	-	마이크로케이블 6x12SM SP1896 B-LITE^{33}	PA	SM	4.7 (mm)	72	6

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.