

LANmark-6 Cable

LANMARK-6 F2/UTP LSZH 500M REEL

Aginode Ref: N100.662

- Comply with all Category 6 cable standards
- Support Class E applications
- Central cross member maintains geometry and performance
- Tested up to 350MHz

Application

Aginode LANmark-6 cables are the ideal solution for most of today's network requirements in normal office environments. They are manufactured and tested to the latest Category 6 specifications defined in the International and American cable standards and are designed to meet the quality and performance criteria needed to support all applications up to 250 MHz.


- 10baseT Ethernet
- 100baseTX Fast Ethernet
- 1000baseTX Gigabit Ethernet
- 155 MBit ATM
- 622 MBit ATM
- 1.2 Gbit ATM
- future class E applications

Design

The LANmark-6 F2/UTP cables have AWG 24 solid copper wires. The PE central cross filler helps maintain the stability of the cable geometry and reduces the risk of a reduction in performance when bending the cable. The cables are available with a Dark Grey PVC sheath compliant with IEC 60332-1.

Performance

Tested to 350 MHz and with guaranteed performance to 250 MHz, Aginode LANmark-6 cables exceed the requirements of the International, European and American cable standards, including ISO/IEC 11801, IEC 61156-5, EN 50173, EN 50288 and

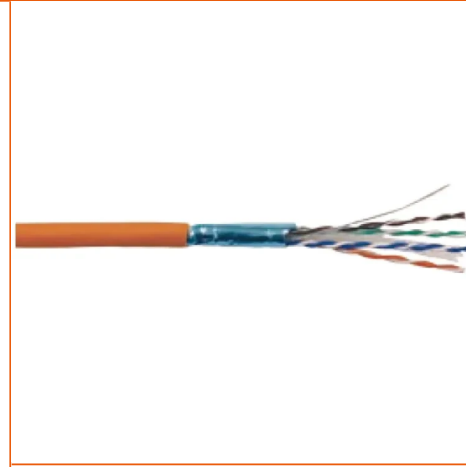

STANDARDS

ANSI/TIA-568-C.2
EN 50288
IEC 61156-5
ISO/IEC 11801-1

Installation

LANmark-6 F2/UTP cables have a shielded construction with a double global foil around the 4 pairs, offering optimal EMC performance. The outer screen is removed when stripping the outer sheath, leaving the inner foil in place with the aluminium side facing outwards. This increases installation efficiency as the foil does not need to be folded back to establish contact with the EMC rear cover of the LANmark connectors.

Guarantees

The LANmark-6 cable performance is guaranteed to meet or exceed the requirements of the above mentioned standards.

Traceability codes on both cable and packaging ensure quality validation of the installed cable.

Installations with LANmark-6 cable and connectivity are qualified for a 25 year full system warranty, which includes Parts, Channel Performance, Application Support and Labour, as described in the Aginode Certified System Warranty.

Electrical Performance LANmark-6 Cable

Freq. in MHz	IL in Db/100m		NEXT in dB		PSNEXT in dB		ACR-F in dB		PS ACR-F in dB		RL in dB	
	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
1	2,0	2,0	74,3	80,3	72,3	78,3	67,8	72,8	64,8	69,8	20,0	22,0
4	3,8	3,8	65,3	71,3	63,3	69,3	55,8	60,8	52,8	57,8	23,0	25,0
10	6,0	6,0	59,3	65,3	57,3	63,3	47,8	52,8	44,8	49,8	25,0	27,0
16	7,6	7,6	56,2	62,2	54,2	60,2	43,7	48,7	40,7	45,7	25,0	27,0
20	8,5	8,5	54,8	60,8	52,8	58,8	41,8	46,8	38,8	43,8	25,0	27,0
31,25	10,7	10,7	51,9	57,9	49,9	55,9	37,9	42,9	34,9	39,9	23,6	25,6
62,5	15,4	15,4	47,4	53,4	45,4	51,4	31,9	36,9	28,9	33,9	21,5	23,5
100	19,8	19,8	44,3	50,3	42,3	48,3	27,8	32,8	24,8	29,8	20,1	22,1
155	25,2	25,2	41,4	47,4	39,4	45,4	24,0	29,0	21,0	26,0	18,8	20,8
200	29,0	29,0	39,8	45,8	37,8	43,8	21,8	26,8	18,8	23,8	18,0	20,0
250	32,8	32,8	38,3	44,3	36,3	42,3	19,8	24,8	16,8	21,8	17,3	19,3
300	-	36,4	-	43,1	-	41,1	-	23,3	-	20,3	-	18,8
350	-	39,8	-	42,1	-	40,1	-	21,9	-	18,9	-	18,3

LANmark-6 F2/UTP LSZH 500m reel

Characteristics

구조적 특성

색상	주황색
스크린	알루미늄 호일
피복	저연 할로겐 프리
Type of cable	F ² TP

치수

Conductor cross-section (AWG/KCMIL)	23
Diameter over insulation	1.13 mm
Nominal outer diameter (mm)	7.7 mm

전기적 특성

Mutual capacitance	56 nF/km
Characteristic impedance	100 Ohm

기계적 특성

Maximum operating pulling force	100 N
---------------------------------	-------

Transmission characteristics

Skew	45 ns/100m
Attenuation Crosstalk Ratio, 250MHz	5.5 dB/100m
Nominal Velocity of Propagation (NVP)	69 %
Coupling attenuation at 30 MHz	>70 dB
Propagation delay, max. 100 MHz	536 ns/100m

사용 특성

Range	LANmark-6
操作温度范围	-20...60 °C
Category	Cat. 6
난연	IEC 60332-1
연기밀도	IEC 61034
Packaging	Reel
Ambient installation temperature, range	-10...60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

최소 굽힘 반지름 - 설치시 (장력작용)

58 mm

최소 굽힘 반지름 - 설치 후

29 mm

문서

Freetable LM6 cables_Family_2.xls xls — 23 KB [다운로드](#) ↓