
LANmark Industry DIN-Rail Outlets and boxes

LANMARK INDUSTRY MODULE DIN-RAIL MOUNT WITH 1 SNAP-IN CATEGORY 6 GREY - DISCONTINUED

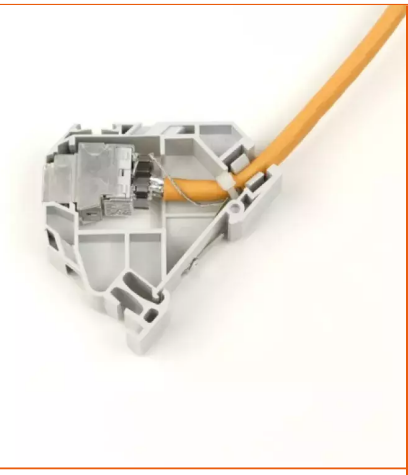

Aginode Ref: N20i.000

- For DIN-Rail mount (35mm)
- Data connection for the industry
- Easy termination, without punch down tool.
- Includes Mount + LANmark-6 shielded connector
- For technical enclosures, Wireless Access Points, Industrial cabinets

Application

LANmark Industry DIN-Rail mount는 35mm DIN-Rail에 적합한 산업용 캐비닛에 LANmark-6 스냅-인 데이터 커넥션 설치가 가능하도록 설계되었습니다. 몇몇의 DIN-Rail mount는 결합되어 줄을 형성 할 수 있습니다. LANmark-6 커넥터는 ISO/IES 11801:2002의 요구 조건을 넘어섭니다. 그리하여 LANmark-6 커넥터는 Cat 5, Cat 5e, Cat 6의 아래와 같은 모든 데이터 어플리케이션을 지원 할 수 있습니다:

- 10baseT
- Fast Ethernet
- Gigabit Ethernet
- 155 ATM
- 622 ATM
- 1.2 ATM
- Industrial Ethernet

Performance

LANmark-6 스냅-인 커넥터는 Cattgory 6의 가장 높은 성능을 달성 할 수 있도록 설계되었으며 TIA/EIA-568B.2-1과 IEC 60603-7-5 (차폐) 표준 조건의 모든 테스트를 완료하였습니다. 더욱이 Delta의 독립적 테스트 인증과 같은 일반적인 케이블 제품의 EC 검증의 상태와 조건을 수용 합니다.

Installation

LANmark-6 스냅-인 커넥터는 별도의 툴 없이 종단 작업이 가능하도록 설계되었으며 빠르고 손쉬운 설치를 위하여 컴포짓 툴을 사용 할 수 있습니다.

- 빠른 종단 작업
- 색상 코드 : TSB568A & TSB568B
- 사용 가능한 타입의 케이블 : UTP, F/UTP, SF/UTP, S/FTP
- 22, 23, 24 AWG 케이블, PUR, LSZH 수용 가능

STANDARDS

IEC 60603-7-5
ISO/IEC 11801
ISO/IEC 24702

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- 모든 LANmark 산업용 케입들에 적합

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark Industry module DIN-rail mount with 1 Snap-In Category 6 grey - DISCONTINUED

Characteristics

구조적 특성	
Cable entry	상단에서부터
색상	회색
Connector type	RJ 45
Material	ABS
스크린	예
치수	
Approximate weight per piece	0.03 kg
Depth	65 mm
Dimensions of screw	N/A
Height	77.8 mm
Length cable end on inner side	80.0 mm
Number of cables	1
Wall thickness	1.6 mm
Width	18 mm
전기적 특성	
Characteristic impedance	100 Ohm
Maximal operating frequency	250 MHz
기계적 특성	
Mechanical resistance to impacts	Low
사용 특성	
Category	Cat. 6
Component function	Cabling and Connectivity solutions
Electro magnetic interference resistance	Yes
Field of application	Industrial installations
최대 운용 온도	70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Number of ports	1
Packaging	Plastic bag
RoHS compliant	Yes
Water proof	No

문서

Freetable LM6 conn.xls xls — 13.5 KB 다운로드

판매 및 배송 정보

The LANmark-6 DIN-Rail Mount is fitted an earthing key. Please read the indstallation guidelines for proper grounding connection to the DIN-Rail.Set of covers (right-left) available (N20i.002)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.