
LANmark Industry DIN-Rail Outlets and boxes

LANMARK INDUSTRY MODULE DIN-RAIL MOUNT WITH 1 SNAP-IN CATEGORY 6A GREY

Aginode Ref: N20i.004

- For DIN-Rail mount (35mm)
- Data connection for the industry
- Easy termination, without punch down tool.
- Includes Mount + LANmark-6A shielded connector
- For technical enclosures, Wireless Access Points, Industrial cabinets

산업용 환경과 위험 노출 영역의 LAN을 위한 DIN-Rail mount 아웃렛과 박스.

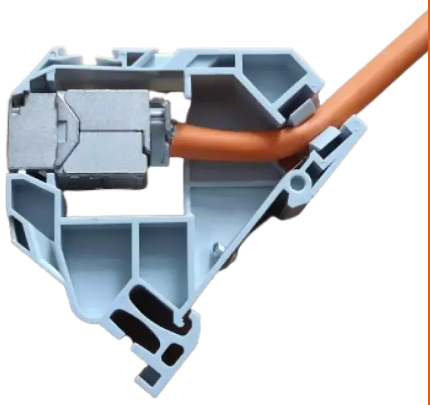

STANDARDS

ISO/IEC 11801
ISO/IEC 24702

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark Industry module DIN-rail mount with 1 Snap-In Category 6A grey

Characteristics

구조적 특성	
Cable entry	상단에서부터
색상	회색
Connector type	RJ 45
Material	ABS
스크린	예
치수	
Approximate weight per piece	0.03 kg
Depth	65 mm
Dimensions of screw	N/A
Height	77.8 mm
Length cable end on inner side	80.0 mm
Number of cables	1
Wall thickness	1.6 mm
Width	18 mm
전기적 특성	
Characteristic impedance	100 Ohm
Maximal operating frequency	500 MHz
사용 특성	
Category	Cat. 6A
최대 운용 온도	70 °C
Number of ports	1
Packaging	Set of 12 modules individually bagged (in cardboard box)

Installation instructions DIN-rail mount module with LANmark-6A ULTIM connector

PROM N20i.004.pdf pdf — 9.48 MB 다운로드

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

판매 및 배송 정보

The LANmark-6A DIN-Rail Mount is fitted with a earth tag for termination of the cable drain wire / shield - to provide a grounding connection to the DIN-Rail. Please see installation guide. A set of covers for both sides of the module is also available (N20i.002).

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.