LANmark-OF Slimflex 패치 코드, 단일모드

LANMARK-OF SLIMFLEX 심플렉스 패치 코드 LC/UPC-LC/UPC SM LSZH XM 노란색



Aginode Ref: N122S.4LLYX

- 광섬유 패치 코드
- LANmark-OF 단일모드 성능
- GIGAliteFLEX 굴곡에 강한 광섬유
- 캐비닛 및 작업장에서 사용

보증 및 설치

Aginode LANmark-OF 광섬유 패치 코드는 고속 프로토콜을 지원하는 실내 사용을 위해 설계되었습니다.

일반적인 설치 환경은 다음과 같습니다:

- 패치 패널을 능동 장비에 연결하는 캐비닛.
- 데이터 센터 내 크로스 커넥트.
- 워크스테이션을 벽면 콘센트에 연결하는 작업 구역(Fibre To The Desk)에서 사용하기에 적합합니다.

STANDARDS

ISO/IEC 11801

특성


- IEC 61300-3-4에 따른 최대 삽입 손실: 0.25 dB
- 일반적인 삽입 손실: 0.1 dB
- IEC 61300-3-6에 따른 LC/UPC의 최소 반사 손실: 50 dB
- IEC 61300-3-6에 따른 LC/APC의 최소 반사 손실: 65 dB
- 19mm 길이의 짧은 커넥터 부트
- 작은 굽힘 반경: 10 mm
- 커넥터 근처에 추적성 라벨이 부착되어 있습니다

광섬유 유형

LANmark-OF SM 패치 코드 내부에는 LANmark-OF SMGIGAliteFLEX 광섬유가 사용됩니다. 이 광섬유는 굽힘에 강하며 ITU-T G.657.A1 및 IEC 60793-2-50(광섬유 모델 B6.a1)을 준수합니다. 단일 모드 피그테일의 피그테일 재킷은 노란색입니다.

회로도 극성 패치 코드

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

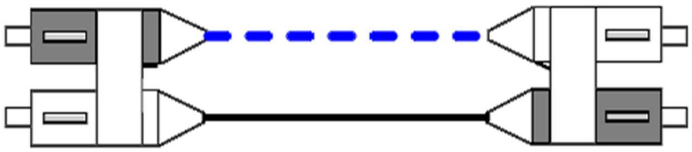

Cross-over patch cord (A1 to B2 & B1 to A2)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF Slimflex 심플렉스 패치 코드 LC/UPC-LC/UPC SM LSZH Xm 노란색

Characteristics

구조적 특성	
Fiber optic type	싱글 모드 9/125
피복	저연 할로겐 프리 난연
Connector type	LC
Armour type	아라미드
색상	노란색
치수	
Width	2 mm
Nominal inner diameter	2.0 mm
Height	2 mm
기계적 특성	
Maximum pulling force (IEC 60794-1-2-E1)	200 N
Crush resistance (IEC 60794-1-E3)	100 N/cm
Transmission characteristics	
Insertion Loss, maximum, dB	0.25 dB
Return Loss, Minimum, dB	50 dB
사용 특성	
操作温度范围	-10...50 °C
Minimum static operating bending radius	10 mm
난연	IEC 60332-1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.