

LANmark-7A Cable

LANMARK-7A 1250 S/FTP AWG23 CAT 7A 1250MHZ LSZH DCA S2 D1 A1 ORANGE 1000M REEL

Aginode Ref: N100.371-OD

- High Quality Data Cables for simultaneous use with POE+ and POE++
- All Cable exceed Category 7A in terms of ACR and Frequency Range
- Superior Performance with positive ACR over the full frequency range
- Optimised for use with LANmark-7A GG45 connector
- Easy to install with GG45 connectivity through special foil construction

p>Description

LANmark-7A is a 4 pair S/FTP cable with individual pair foils and an overall braid offering superior performance up to at least 1250MHz. It is fully compliant with the latest Category 7A standard and offers even large headroom above the Cat 7A requirement. Due to this excellent electrical performance and positive ACR up to at least 1250MHz the cable supports the applications like 10GBASE-T as well as 25GBASE-T


Application

LANmark-7A is the highest performing standardised cabling solution in the market and will support all current Ethernet applications up to 25G and all planned applications using cabling up to Class FA.

- All Ethernet applications including
- 10/100/1000Base-T
- 1000Base-TX
- 10GBase-T
- 25GBase-T
- POE, POE+, POE++ (Draft)
- Cable sharing applications including CATV up to 862MHz
- Any future Class FA application

Installation

Ease of Installation is one of the main features of the LANmark-7A cable. Extra attention has been paid to ensure

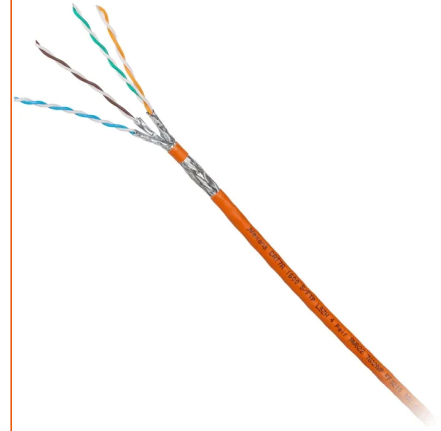

STANDARDS

EN 50173
EN 50288-4-1
IEEE 802.3bt (PoE++)
ISO/IEC 11801
ISO/IEC 61156-5

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

that the screen coverage is maintained and foils do not open during installation. The cable has been specially designed to be used in conjunction with the LANmark-7A GG45 12C connector.

To support the correct set-up of hand held analysers for installation testing, the actual cable NVP value is given in the cable's print legend.

Electrical Performance LANmark-7A 1250 Cable

| Frequency (in MHz) | Attenuation (in dB/100m) | | NEXT pp (in dB) | | ACR-F (in dB) | | RL (in dB) | | Coupling Att. (in dB) | | PSANEXT (in dB) | | PSAFEXT (in dB) | |
|-----------------------|-----------------------------|---------|--------------------|---------|------------------|---------|---------------|---------|--------------------------|---------|--------------------|---------|--------------------|---------|
| | Std Max | Typical | Std Min | Typical | Std Min | Typical | Std Min | Typical | Std Min | Typical | Std Min | Typical | Std Min | Typical |
| 1 | 4.0 | 4.0 | 65.0 | 104.8 | 65.0 | 70.0 | 19.0 | 38.0 | 80.0 | 100.0 | 67.0 | 92.4 | 80.0 | 83.0 |
| 4 | 4.1 | 4.0 | 65.0 | 94.6 | 65.0 | 70.0 | 19.0 | 32.0 | 69.0 | 94.0 | 67.0 | 92.1 | 79.0 | 82.0 |
| 10 | 6.4 | 6.3 | 65.0 | 87.8 | 65.0 | 70.0 | 19.0 | 28.0 | 60.0 | 86.0 | 67.0 | 91.0 | 75.0 | 78.0 |
| 16 | 9.0 | 7.9 | 65.0 | 84.2 | 63.3 | 68.3 | 18.0 | 25.0 | 55.9 | 81.9 | 67.0 | 90.0 | 73.0 | 76.0 |
| 20 | 9.0 | 8.9 | 65.0 | 82.5 | 61.4 | 66.4 | 17.5 | 25.0 | 54.0 | 80.0 | 67.0 | 89.4 | 72.0 | 75.0 |
| 31.25 | 11.2 | 11.1 | 65.0 | 79.1 | 57.5 | 62.5 | 16.5 | 23.1 | 50.1 | 76.1 | 67.0 | 88.0 | 71.0 | 74.0 |
| 52.5 | 15.9 | 15.6 | 65.0 | 73.7 | 51.5 | 56.5 | 14.0 | 20.0 | 44.1 | 70.1 | 67.0 | 85.3 | 68.0 | 71.0 |
| 100 | 20.3 | 19.7 | 65.0 | 70.0 | 47.4 | 52.4 | 12.0 | 18.0 | 40.0 | 66.0 | 67.0 | 83.1 | 65.0 | 68.0 |
| 155 | 25.4 | 24.5 | 63.0 | 66.6 | 43.6 | 48.6 | 10.1 | 16.1 | 36.2 | 62.2 | 67.0 | 80.8 | 63.0 | 66.0 |
| 200 | 28.9 | 27.9 | 60.9 | 64.6 | 41.4 | 46.4 | 9.0 | 15.0 | 34.0 | 60.0 | 67.0 | 79.4 | 62.0 | 65.0 |
| 250 | 32.5 | 31.2 | 59.1 | 62.8 | 39.4 | 44.4 | 8.0 | 14.0 | 32.0 | 58.0 | 67.0 | 78.1 | 61.0 | 64.0 |
| 300 | 35.7 | 34.1 | 57.7 | 61.3 | 37.8 | 42.8 | 8.0 | 13.2 | 30.5 | 56.5 | 67.0 | 77.1 | 60.0 | 63.0 |
| 360 | 46.7 | 44.1 | 53.6 | 57.2 | 33.4 | 38.4 | 8.0 | 11.0 | 26.0 | 52.0 | 66.5 | 75.0 | 58.0 | 61.0 |
| 600 | 51.4 | 48.3 | 52.1 | 55.8 | 31.8 | 36.8 | 8.0 | 10.2 | 24.4 | 50.4 | 63.3 | 75.0 | 57.0 | 60.0 |
| 700 | 55.8 | 52.1 | 50.8 | 54.5 | 30.5 | 35.5 | 7.5 | 9.5 | 23.1 | 49.1 | 62.3 | 75.0 | 57.0 | 60.0 |
| 800 | 59.9 | 55.7 | 49.7 | 53.5 | 29.3 | 34.3 | 7.0 | 9.0 | 21.9 | 47.9 | 61.5 | 75.0 | 56.4 | 59.4 |
| 900 | 63.8 | 59.1 | 48.8 | 52.5 | 28.3 | 33.3 | 6.5 | 8.5 | 20.9 | 46.9 | 60.7 | 74.0 | 55.9 | 58.9 |
| 1000 | 67.6 | 62.3 | 47.9 | 51.6 | 27.4 | 32.4 | 6.0 | 8.0 | 20.0 | 46.0 | 60.0 | 73.0 | 55.4 | 58.4 |
| 1250 | | 70.0 | | 42.0 | | 25.0 | | 8.0 | | 40.0 | | 70.0 | | 50.0 |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-7A 1250 S/FTP AWG23 Cat 7A 1250MHz LSZH Dca s2 d1 a1 Orange 1000m reel

Characteristics

구조적 특성

| | |
|---------------|-------------------------|
| 스크린 | 알루미늄 호일 + 주석 도금 구리 브레이드 |
| 피복 | 저연 할로겐 프리 |
| Sheath colour | 주황색 |
| Lead free | Yes |
| Type of cable | S/FTP |
| Drain wire | 없음 |

치수

| | |
|-------------------------------------|----------|
| 무게(근사치) | 61 kg/km |
| Number of pairs | 4 |
| Conductor cross-section (AWG/KCMIL) | 23 |
| Diameter over insulation | 1.45 mm |
| Nominal outer diameter (mm) | 7.7 mm |

전기적 특성

| | |
|--|-----------|
| Mutual capacitance | 45 nF/km |
| Characteristic impedance | 100 Ohm |
| Max. transfer impedance at 30 MHz (Ohm/km) | 50 Ohm/km |
| 20° C에서 최대 도체 DC저항 | 80 Ohm/km |

기계적 특성

| | |
|---------------------------------|-------|
| Maximum operating pulling force | 100 N |
|---------------------------------|-------|

Transmission characteristics

| | |
|---------------------------------------|-------------|
| Skew | 25 ns/100m |
| Nominal Velocity of Propagation (NVP) | 82 % |
| Coupling attenuation at 30 MHz | >85 dB |
| Propagation delay, max. 100 MHz | 536 ns/100m |

사용 특성

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

| | |
|---|--------------------------|
| Range | LANmark-7A |
| Gases corrosivity | IEC 60754-1; IEC 60754-2 |
| Length | 1000 m |
| 操作温度范围 | -20...60 °C |
| Category | Cat. 7A |
| 난연 | IEC 60332-1 |
| 연기밀도 | IEC 61034-2 |
| Packaging | Reel |
| Ambient installation temperature, range | 0...50 °C |
| 최소 굽힘 반지름 - 설치시 (장력작용) | 62 mm |
| 최소 굽힘 반지름 - 설치 후 | 31 mm |

문서

Freetable LM7A 1250 V2-2016.xls xls — 25 KB [다운로드](#) ↓

성과 선언

LANmark-7A 1250 S/FTP AWG23 Cat 7A 1250MHz LSZH Dca s2 d1 a1 Orange 1000m reel pdf — 140.66 KB [다운로드](#) ↓