

# LANmark-7A Cable

LANMARK-7A 1250 S/FTP AWG23 CAT 7A 1250MHZ LSZH CCA S1A D1 A1 ORANGE 1000M REEL

## Aginode Ref: N100.371-OC

- High Quality Data Cables for simultaneous use with POE+ and POE++
- All Cable exceed Category 7A in terms of ACR and Frequency Range
- Superior Performance with positive ACR over the full frequency range
- Optimised for use with LANmark-7A GG45 connector
- Easy to install with GG45 connectivity through special foil construction
- Enhanced reaction-to-fire performance according to CPR classification Cca-s1a,d1,a1 (h/EN50575:2014+A1:2016)

## Description


LANmark-7A are 4 pair S/FTP cables with individual pair foils and an overall braid offering upper frequencies of at least 1250MHz but up to 1600MHz. All cables are fully compliant with Category 7A standard and offer even large headroom above the Cat 7A requirement. Due to this excellent electrical performance and positive ACR all cables supports applications beyond 10GBASE-T, including 25GBASE-T.

## Application

LANmark-7A is the highest performing standardised cabling solution in the enterprise market and will support all current data applications and all planned applications using cabling up to Class FA.

- All Ethernet applications including
- 10/100/1000Base-T
- 1000Base-TX
- 10GBase-T
- 25GBase-T up to 30m
- POE, POE+, POE++ (Draft)
- Cable sharing applications including CATV up to 862MHz
- Any future Class FA application

## Installation

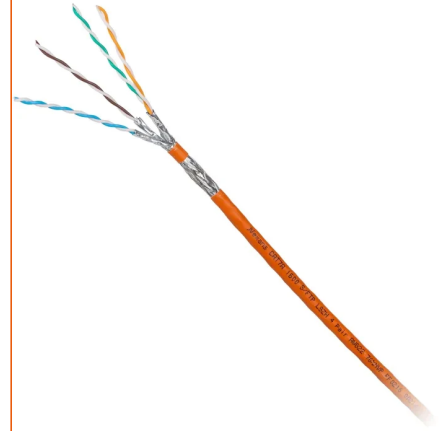

## STANDARDS

EN 50173-1  
EN 50288-4-1  
IEC 60332-3-24  
IEC 61156-5  
IEEE 802.3bt (PoE++)  
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Ease of Installation is one of the main features of the LANmark-7A cable. Extra attention has been paid to ensure that the screen coverage is maintained and foils do not open during installation. The cable has been specially designed to be used in conjunction with the LANmark-7A GG45 12C connector.

To support the correct set-up of hand held analysers for installation testing, the actual cable NVP value is given in the cable’s print legend.

## Electrical Performance LANmark-7A 1250 Cable

Frequency (in MHz)	Attenuation (in dB/100m)		NEXT pp (in dB)		ACR.F (in dB)		RL (in dB)		Coupling Att. (in dB)		PSANEXT (in dB)		PSAFEXT (in dB)	
	Std Max	Typical	Std Min	Typical	Std Min	Typical	Std Min	Typical	Std Min	Typical	Std Min	Typical	Std Min	Typical
1	4.0	4.0	65.0	104.8	65.0	70.0	19.0	38.0	80.0	106.0	67.0	92.4	80.0	83.0
4	4.1	4.0	65.0	94.6	65.0	70.0	19.0	32.0	68.0	94.0	67.0	92.1	79.0	82.8
10	8.4	9.3	65.0	87.8	65.0	70.0	19.0	28.0	60.0	86.0	67.0	91.0	75.9	78.9
16	8.0	7.9	65.0	84.2	63.3	68.3	18.0	26.0	55.9	81.9	67.0	90.0	73.9	76.5
20	9.0	8.9	65.0	82.5	61.4	66.4	17.5	25.0	54.0	80.0	67.0	89.4	72.9	75.9
31.25	11.2	11.1	65.0	78.1	57.5	62.5	16.5	23.1	50.1	76.1	67.0	88.0	71.0	74.0
62.5	15.9	15.6	65.0	73.7	51.5	56.5	14.0	20.0	44.1	70.1	67.0	85.3	68.0	71.0
100	20.3	19.7	65.0	70.0	47.4	52.4	12.0	18.0	40.0	66.0	67.0	83.1	65.9	68.9
155	25.4	24.5	63.0	66.0	43.6	48.6	10.3	16.1	36.2	62.2	67.0	80.8	63.8	66.8
200	28.9	27.9	60.9	64.6	41.4	46.4	9.0	15.0	34.0	60.0	67.0	79.4	62.8	65.8
250	32.5	31.2	59.1	62.8	39.4	44.4	8.0	14.0	32.0	58.0	67.0	78.1	61.8	64.8
300	35.7	34.1	57.7	61.3	37.8	42.8	8.0	13.2	30.5	56.5	67.0	77.1	60.8	63.8
500	46.7	44.1	53.6	57.2	33.4	38.4	8.0	11.0	26.0	52.0	64.5	75.0	58.6	61.6
600	51.4	48.3	52.1	55.8	31.8	36.8	8.0	10.2	24.4	50.4	63.3	75.0	57.8	60.8
700	55.8	52.1	50.8	54.5	30.5	35.5	7.5	9.5	23.1	49.1	62.3	75.0	57.1	60.1
800	59.9	55.7	49.7	53.5	29.3	34.3	7.0	9.0	21.9	47.9	61.5	75.0	56.4	59.4
900	63.8	59.1	48.8	52.5	28.3	33.3	6.5	8.5	20.9	46.9	60.7	74.0	55.9	58.9
1000	67.6	62.3	47.9	51.6	27.4	32.4	6.0	8.0	20.0	46.0	60.0	73.0	55.4	58.4
1250		70.0		42.0		25.0		8.0		40.0		70.0		50.0

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.



# LANmark-7A 1250 S/FTP AWG23 Cat 7A 1250MHz LSZH Cca s1a d1 a1 Orange 1000m reel

## Characteristics

### 구조적 특성

스크린	알루미늄 호일 + 주석 도금 구리 브레이드
피복	저연 할로겐 프리
Sheath colour	주황색
Lead free	Yes
Type of cable	S/FTP
Drain wire	없음

### 치수

무게(근사치)	68 kg/km
Number of pairs	4
Conductor cross-section (AWG/KCMIL)	23
Diameter over insulation	1.45 mm
Nominal outer diameter (mm)	7.9 mm

### 전기적 특성

Mutual capacitance	45 nF/km
Characteristic impedance	100 Ohm
Max. transfer impedance at 30 MHz (Ohm/km)	50 Ohm/km
20° C에서 최대 도체 DC저항	80 Ohm/km

### 기계적 특성

Maximum operating pulling force	100 N
---------------------------------	-------

### Transmission characteristics

Skew	25 ns/100m
Nominal Velocity of Propagation (NVP)	82 %
Coupling attenuation at 30 MHz	>85 dB
Propagation delay, max. 100 MHz	536 ns/100m

### 사용 특성

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Range	LANmark-7A
Gases corrosivity	IEC 60754-1; IEC 60754-2
Length	1000 m
操作温度范围	-20...60 °C
Fire retardant	IEC 60332-3-24 (cat C)
Category	Cat. 7A
난연	IEC 60332-1
연기밀도	IEC 61034-2
Packaging	Reel
Ambient installation temperature, range	0...50 °C
최소 굽힘 반지름 - 설치시 (장력작용)	63 mm
최소 굽힘 반지름 - 설치 후	32 mm

## 문서

Freetable LM7A Channel - 1250.xls xls — 24 KB [다운로드](#) ↓

## 성과 선언

LANmark-7A 1250 S/FTP AWG23 Cat 7A 1250MHz LSZH Cca s1a d1 a1 Orange 1000m reel pdf — 140.71 KB [다운로드](#) ↓