

B-LITE LT - 마이크로 루즈 튜브 케이블

MICROCABLE 12X12SM SP1913 BLITE LT

Aginode Ref: Microcable 12x12SM SP1913 BLite LT


This compact cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by blowing in micro-ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure

Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Ripcord
- Very Low friction outer sheath

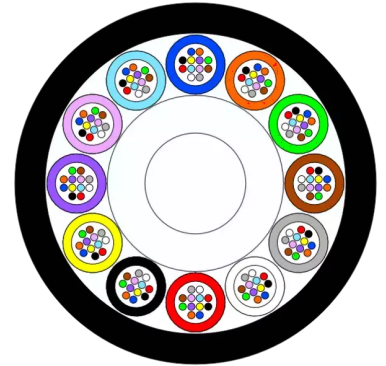

STANDARDS

EN 187000
IEC 60794

Microcable 12x12SM SP1913 BLite LT

Characteristics

구조적 특성

구조	멀티 번들 튜브
Fiber optic type	SM
Metal free	Yes
피복	HDPE
Strength member	FRP

치수

무게(근사치)	49 kg/km
Nominal outer diameter (mm)	7.6 mm
Number of optical fibres	144
Number of tubes	12

기계적 특성

Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum admissible traction load (Tm)	100 daN
Maximum tensile load during service (Tl)	20.0 daN

사용 특성

Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)
Installation type	Outdoor - Microduct blowable
操作温度范围	-30...60 °C
Storage temperature, range	-40...70 °C