
B-LITE LT - 마이크로 루즈 튜브 케이블

MICROCABLE 4X12SM SP2003

Aginode Ref: Microcable 4x12SM SP2003 BLite LT

This compact cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be quickly installed by blowing in micro-ducts.

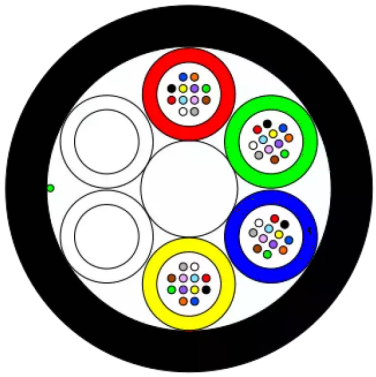

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure

STANDARDS

EN 187000
IEC 60794

Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Very Low friction outer sheath

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Microcable 4x12SM SP2003

Characteristics

구조적 특성	
구조	멀티 번들 튜브
Fiber optic type	SM
Metal free	Yes
피복	HDPE
Strength member	FRP
치수	
무게(근사치)	23 kg/km
Nominal outer diameter (mm)	5.3 mm
Number of optical fibres	48
Number of tubes	4
기계적 특성	
Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum admissible traction load (Tm)	50 daN
Maximum tensile load during service (Tl)	20.0 daN
사용 특성	
Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)
Installation type	Outdoor - Microduct blowable
操作温度范围	-30...60 °C
Storage temperature, range	-40...70 °C

문서

White Paper Microblown Cable pdf — 1.94 MB 다운로드

판매 및 배송 정보

Standard Marking

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Aginode - FIBRE OPTIC CABLE - SPxxxx - XX*YY - FB - TN - metric

XX = Fibre Count
YY = Fibre Type
FB = Produced in Frameries, Belgium
TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.