

덕트 - 느슨한 튜브 케이블

LOOSE TUBE LSZH CABLE 6X12SM SP1499

Aginode Ref: A/I-DQ(ZN)B2Y


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling for indoor and outdoor use.

Characteristics & Applications

- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure
- Zero Halogen
- Non corrosive smoke emission
- Flame non propagation IEC 60332-1

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- LSZH outer sheath

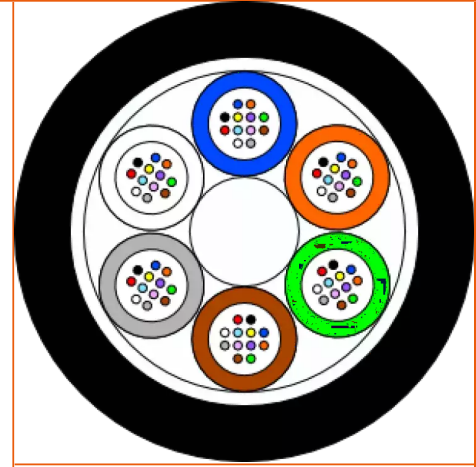

STANDARDS

EN 187000
IEC 60794
IEC 60332-1
IEC 60754-1
IEC 61034

Loose Tube LSZH Cable 6x12SM SP1499

Characteristics

구조적 특성

Armour type	유리 섬유사
피복	LSZH compound
Fiber optic type	SM (G.652D)
구조	루즈 튜브
Metal free	Yes
Strength member	FRP

치수

Number of tubes	6
Number of optical fibres	72
Nominal outer diameter (mm)	10.0 mm
무게(근사치)	105 kg/km

기계적 특성

Crush resistance (IEC 60794-1-E3)	300 N/cm
Maximum admissible traction load (Tm)	400 daN

사용 특성

Installation type	Indoor/Outdoor
操作温度范围	-30...60 °C
Bending factor when laying	20 (xD)
Storage temperature, range	-40...60 °C
Rodent protection	Glass yarns
Ambient installation temperature, range	0...40 °C



판매 및 배송 정보

Standard Marking

Aginode - MG LSZH - SP1499 - FIBRE OPTIC CABLE - XX*YY - TN - metric

XX = Fibre Count

YY = Fibre Type

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.