


# Pre-Connectorized Drop Cable (PCDC)


DUAL JACKET - ADSS, FAÇADE, PULLED IN DUCTS - 5.1 MM 1FO



SP1892

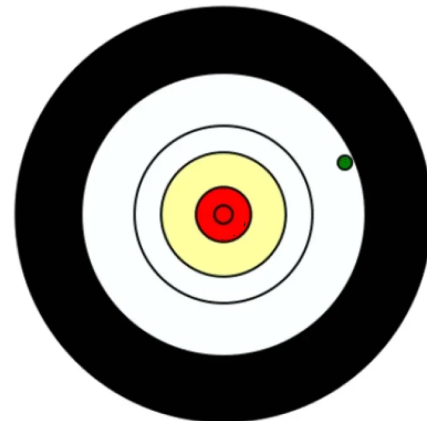

SP1892

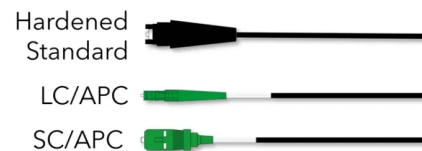

## STANDARDS

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

**Aginode Ref:** PCDCDxxxx - SP1892

**Connectorization available:**

- Hardened Standard
- SC/APC
- LC/APC
- Hybrid jumpers are available with different connectors on each end

**Lengths (in m) and packaging available:**

- Up to 350m
- Individual recyclable paper bag
- Individual recyclable cardboard box. With spool of durable cardboard for long lengths

## Description

This cable is designed for subscriber connections in terminal part. It's suitable for façade installation.

## Characteristics & Applications

- Dual sheath cable
- All dielectric design
- UV resistant PE outersheath
- LSZH inner sheath with CPR rating : Cca s1a d1 a1
- Waterproof structure

## Construction

- Tight fibre 900µm
- LSZH inner cord SP1909 with 2.2mm diameter.
- Glass yarns reinforcements for facade applications
- PE UV resistant outersheath
- When connectorized with SC/APC or LC/APC
  - Min. length from the end of the jacket to the end of the ferrule: 90mm
  - Cable retention (cable-connector): 70N, 60s
- When connectorized with Hardened Standard
  - Cable retention (cable-connector): 300N, 60s

# Dual jacket - ADSS, Façade, Pulled in ducts - 5.1 mm 1FO

## Characteristics

### 구조적 특성

색상	검은색
Dielectric	예
Fiber optic type	SM (G657.A2)
피복	PE
Type of cable	Dual Jacket

### 치수

무게(근사치)	26 kg/km
Cable Diameter	5.1 mm
Number of optical fibres	1
Number of optical fibres, range	...

### Transmission characteristics

Insertion Loss, maximum, dB	0.25 dB
Insertion loss, typical value	0.12 dB
Return Loss, Minimum, dB	65 dB

### 사용 특성

Field of application	Customer connection
Installation temperature, range	0...40 °C
Installation type	Indoor/Outdoor
최소 굽힘 반지름 - 설치 후	20 (xD) 102 mm mm