

덕트 - 느슨한 튜브 케이블

LOOSE TUBE ARMORED CABLE SP1978

Aginode Ref: A-DQ(ZN)B2Y 6x12SM


This cable is used for access, distribution, urban network and FTTx applications. It is designed to be installed by pulling or blowing into ducts.

Features and applications

- High blowing distance thanks to the excellent friction properties of the outer sheath
- Reinforced central resistance element
- Fully dielectric design
- Sealed dry core structure

Construction

- Jelly-filled tubes containing coloured fibres
- FRP central strength member
- Low-friction HDPE outer sheath (wall thickness 1.5 mm)

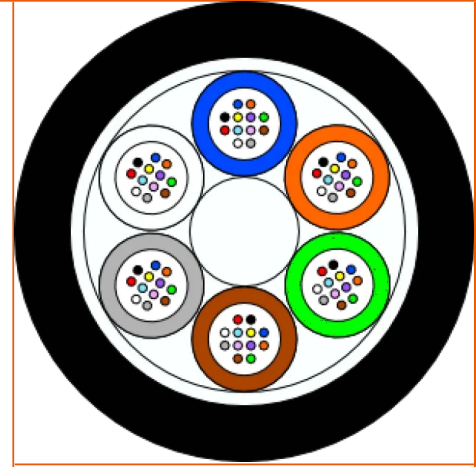

STANDARDS

EN 187000
IEC 60794

Loose Tube Armored Cable SP1978

Characteristics

구조적 특성

Armour type	유리 섬유사
피복	HDPE
Fiber optic type	SM (G.652D)
구조	루즈 튜브
Metal free	Yes
Strength member	FRP

치수

Number of tubes	6
Number of optical fibres	12-72
Nominal outer diameter (mm)	10.6 mm
무게(근사치)	92 kg/km

기계적 특성

Crush resistance (IEC 60794-1-E3)	200 N/cm
Maximum admissible traction load (Tm)	400 daN

사용 특성

Installation type	Outdoor - Duct
操作温度范围	-40...70 °C
Bending factor when laying	20 (xD)
Storage temperature, range	-40...70 °C
Rodent protection	Glass yarns
Ambient installation temperature, range	-5...50 °C