

덕트 - 느슨한 튜브 케이블

UNITUBE LSZH CABLE 1X24SM SP1715

Aginode Ref: SP1715


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling for indoor and outdoor use.

Characteristics & Applications

- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure
- Zero Halogen
- Non corrosive smoke emission
- Flame non propagation IEC 60332-1

Construction

- Jelly filled central tube containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- LSZH outer sheath

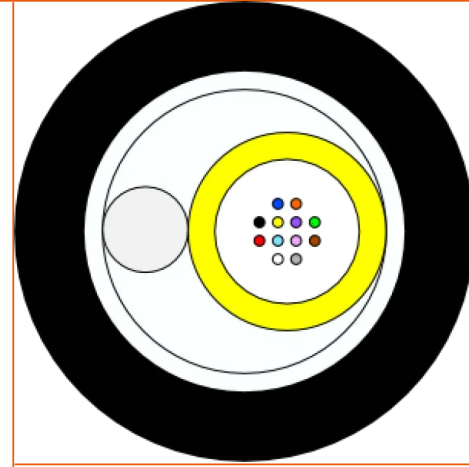

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Unitube LSZH Cable 1x24SM SP1715

Characteristics

구조적 특성

Armour type	유리 섬유사
구조	루즈 튜브
Fiber optic type	SM (G657.A1)
Metal free	Yes
피복	저연 할로겐 프리
Strength member	FRP

치수

무게(근사치)	59 kg/km
Nominal outer diameter (mm)	6.9 mm
Number of optical fibres	24
Number of tubes	1

기계적 특성

Crush resistance (IEC 60794-1-E3)	200 N/cm
Maximum admissible traction load (Tm)	180 daN

사용 특성

Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)
Installation type	Outdoor
操作温度范围	-30...60 °C
Rodent protection	Glass yarns
Storage temperature, range	-30...70 °C