

덕트 - 느슨한 튜브 케이블

LOOSE TUBE CABLE 6X12SM SP1976

Aginode Ref: Loose Tube Cable 6x12SM SP1976


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling or blowing in ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

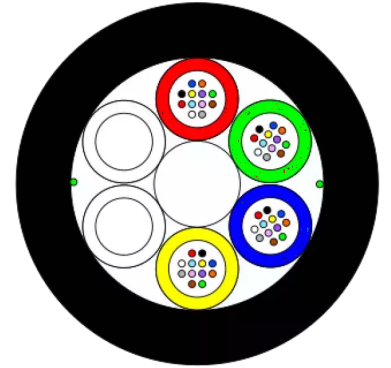

STANDARDS

EN 187000
IEC 60794

Loose Tube Cable 6x12SM SP1976

Characteristics

구조적 특성

Fiber optic type	SM
Armour type	비피복
피복	HDPE
Metal free	Yes
Strength member	FRP
구조	루즈 튜브

치수

Number of tubes	6
무게(근사치)	78 kg/km
Number of optical fibres	72
Nominal outer diameter (mm)	10.2 mm

기계적 특성

Maximum admissible traction load (Tm)	400 daN
Crush resistance (IEC 60794-1-E3)	200 N/cm

사용 특성

Rodent protection	No
操作温度范围	-20...70 °C
Storage temperature, range	-30...60 °C
Installation type	Outdoor - Duct
Ambient installation temperature, range	-5...50 °C
Bending factor when laying	20 (xD)