

# LANmark-OF Loose Tube Universal 48 - 72 - 96 & 144FO - Cca

LANMARK-OF LOOSE TUBE UNIVERSAL 144XSINGLEMODE 9/125 OS2 LSZH CCA YELLOW

**Aginode Ref:** N164.LTUN144-YC

- Loose Tube Universal optical fibre cable with high-level transmission: OS2
- High fire performance: Reaction to fire Cca according to EN50575:2014+A1:2016
- Indoor/Outdoor cable
- Designed for splicing with pigtailed


The new **144FO OS2 Loose Tube technology** from Aginode is specifically engineered for indoor buildings & Outdoor where installations require both high performance and fire safety. Designed with a loose tube construction, it offers excellent protection for fibers against mechanical stresses and environmental factors.

- **CPR (Cca s1a, d1, a1):** Low fire propagation, reduced smoke emission, and minimal toxic gas release.
- **Loose Tube Construction:** Excellent fiber protection against mechanical stress and temperature variations.
- **Indoor & Outdoor installation :** Ideal for structured cabling in residential, commercial, and public buildings, with environmental resistance for exposed sections.
- **High Performance OS2:** Reliable, high-speed data transmission over long distances.
- **Flexible and Robust**
- **UV-Resistant & Waterproof:** Designed to withstand outdoor conditions when required.

The central tube contains up to 144 fibers organized in 12 bundles of 12 fibers, each clearly identified to simplify installation.

## Applications:

- Building backbone networks
- Data centers
- Outdoor installations

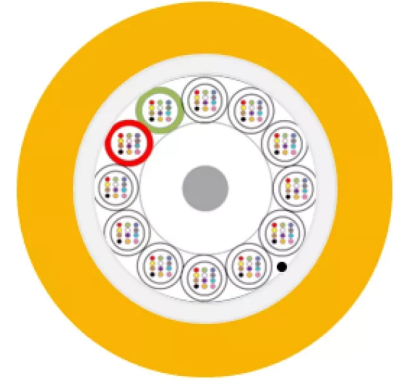

## STANDARDS

ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# LANmark-OF Loose Tube Universal 144xSinglemode 9/125 OS2 LSZH Cca Yellow

## Characteristics

### 구조적 특성

구조	루즈 튜브
Fiber optic type	SM (G657.A1)
Halogen free	IEC 60754-2
Material used for longitudinal water tightness	Jelly
피복	저연 할로겐 프리

### 치수

무게(근사치)	240 kg/km
Nominal outer diameter (mm)	15 mm
Number of optical fibres	144
Number of tubes	12

### 기계적 특성

Crush resistance (IEC 60794-1-E3)	2000/10 N/cm
Maximum pulling force (IEC 60794-1-2-E1)	1800 N
Mechanical resistance to impacts (IEC 60794-1-E4)	20 N · m
Nominal permanent tensile strength	0.6 kN

### 사용 특성

난연	IEC 60332-3-24
Installation temperature, range	-20...60 °C
Installation type	Indoor/Outdoor
Minimum dynamic operating bending radius	300 mm
Minimum static operating bending radius	150 mm
操作温度范围	-40...70 °C
연기밀도	IEC 61034-2
Storage temperature, range	-30...60 °C
U.V resistance	Very good

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

## DoP: Declaration of Performance

DOP\_LTUN\_144XSM OS2\_Cca.pdf pdf — 59.08 KB [다운로드](#) ↓

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*