

LIGHTDROP

LIGHTDROP L - SPLITTER 1:8

Aginode Ref: LDSFLA08HQQNA01SC00NASTNANANA


Featuring:

- 8 Hardened Quarter Turn (FastConnect compatible) front ports for customer connections (Ports 1 to 8).
- 1 Hardened Quarter Turn (FastConnect compatible) bottom port for splitter IN.
- Mounting bracket options for overlenght cable storage.

Terminal max. attenuation*:

Splitter ratio	Splitter port
1:8	10.70 dB

*Total terminal attenuation, including insertion losses from pre-connectorization.

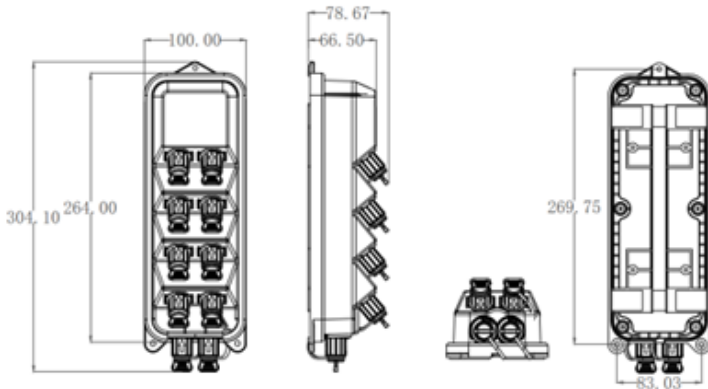

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LIGHTDROP L - Splitter 1:8

Characteristics

구조적 특성

색상	검은색
Material	PP

기계적 특성

IK Rating	8
-----------	---

사용 특성

Installation type	Outdoor
操作温度范围	-40...65 °C
Packaging	Box
RoHS compliant	Yes
U.V resistance	Yes
Watertightness	IP 68

ABS 1642 Ind.A .pdf pdf — 2.5 MB [다운로드](#) ↓