
# DCmark Rack Unit Solution Server DC

**DCMARK RACK UNIT SOLUTION SERVER DC 42U 800X800**



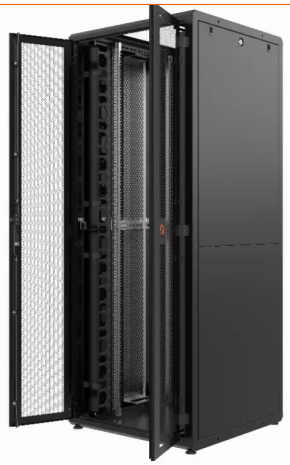

**Aginode Ref:** NRCK.420808440-B

The DCmark RUS NRCK.420808440-B is a high-performance server rack engineered for optimal airflow thanks to his high perforation ration at 80%. With the need of IA and GPU server more and more heavy, the DCmark rack metallic frame is designed to support high loading capacity :

- Loading capacity up to 1500kg to support heavy server
- Perforation ratio at 80% to offer a perfect air flow
- Double doors for a better access
- Lateral cable manager to ensure easy cable management and high reliability
- optional : rear support for intelligent PDU and internal lateral cable tray

The NRCK.420808440-B, offer a height of 42U with a depth of 800mm and width of 800mm

The DCmark RUS NRCK.420808440-B is a high-performance server rack engineered for optimal airflow thanks to his high perforation ration at 80%. With the need of IA and GPU server more and more heavy, the DCmark rack metallic frame is designed to support high loading capacity up to 1500kg.

Equipped with several features and smart cable management, DCmark Rack Unit Solution will ensure reliability, easy installation & easy maintenance for DC technician. The cable management will ensure good cable management and ensure perfect bending radius for cable and patch cord in order to offer the best performance especially for fiber optical cable.

The double front door will offer a full access to the cabling in order to facilitate all technical intevention inside the rack. The doors are equipped with a 3 locking point system closing to ensure high security level. Smart handle with RFDI card can be also installed to avoid key management.

The NRCK.420808440-B, offer a height of 42U with a depth of 800mm and width of 800mm

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# DCmark Rack Unit Solution Server DC 42U 800x800

## Characteristics

| | |
|---|---|
| **구조적 특성** | |
| Cabinet format | 19" |
| Cabling management | Gestion de câble latérale |
| 색상 | 검은색 |
| Cable entry | Entrée supérieure via passe-fil balai et accès par la base |
| Material | 스틸 |
| Rack version | Server |
| Type of front door | Double porte AV perforée |
| Type of rear door | Double porte AR perforée |
| **치수** | |
| 19'' mounting | Avant & Arrière |
| Height | 2017 mm |
| Width | 800 m |
| Approximate net weight | 114 kg |
| Depth | 800 mm |
| Heightunit | 42 U |
| **기계적 특성** | |
| IK Rating | 07 |
| **사용 특성** | |
| Packaging | carton |
| Locking system | 3 points de fermeture avec poigné |

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*