
essential-OF TB LSZH 48-96C - 아시아태평양 지역

ESSENTIAL-OF 타이트 버퍼 LSZH BI OM3 72C 오렌지색

Aginode Ref: N275.TBIN72O

밀착형 버퍼 광섬유 케이블

- 백본/수평 배선을 위해 설계된 실내용 케이블
- OM3 및 단일모드 G.652.D 규격으로 제공
- 외피는 저연무 무할로겐(LSZH) 소재

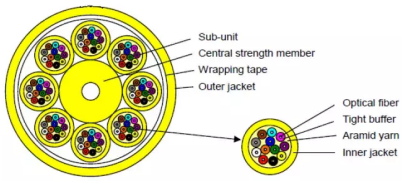

?? ?? ? ??

Essential-OF TB ??? ??? ???? ??, ?? ?? ? ??? ?? ???????. ? ??? ???? 900?m ??? ??? ???? ?????. ???? ???? ??? ???? ??? , ??? ??? ?? ??? ?? LSZH ??? ?? ????. Essential-OF TB? ??? ?? OM3 ? ???? G.652.D ???? ?????.

? ????? ?? ?? ?? ??? ??? ?? ??? ??? ????. ? ????? ?? ?? ?? ??? ???? ?? ??? ??? ? ????.

- ?? ? ?? ?? ?? ??
- ?? ???? ? ???? ???? ?? ??
- LSZH ??
- ??? ??? ???

STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3-24
IEC 60793-2-10
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

essential-OF 타이트 버퍼 LSZH BI OM3 72C 오렌지색

Characteristics

구조적 특성	
Fiber optic type	OM3 50/125
색상	주황색
치수	
Number of optical fibres	72
외경	17.5 mm
기계적 특성	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	1500 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
사용 특성	
Installation temperature, range	0...40 °C
Storage temperature, range	-20...60 °C
操作温度范围	-20...60 °C
Minimum dynamic operating bending radius	350 mm
Minimum static operating bending radius	175 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.