

# LANmark-OF UC Outdoor LSZH 2-24core APAC Region

- Suitable for in ducts or direct burial
- Corrugated steel tape armour
- Gel filled tube
- Available to multimode and singlemode fibre
- Provides rodent protection
- Outer Jacket is Low Smoke Zero Halogene (LSZH)

## Description and Application

Aginode LANmark-OF UC fibre cable is designed for outdoor applications. The construction is suitable for use outdoor for direct burial. It consists of a Unitube structure protected by corrugated steel tape armouring, the Unitube can hold up to 24C fibres. This provides rodent protection and high crush resistance. The cable has a LSZH outer jacket.


## Construction

Legend accompanying the cross section drawing:

1. Optical fibres (250 um)
2. Waterproof gel filling
3. Loose tube
4. Glass Yarn
5. Corrugated steel tape armour
6. LSZH outer jacket with UV resistant additive

## Characteristics

- Flame retardant (IEC 60332-1) and fire retardant (IEC 60332-3-24)
- Designed for termination by splicing
- Central loose tube design
- Corrugated steel protection
- Waterproof structure and UV-resistant
- Available in Multimode and Singlemode fibre
- Available from 2-24 fibres

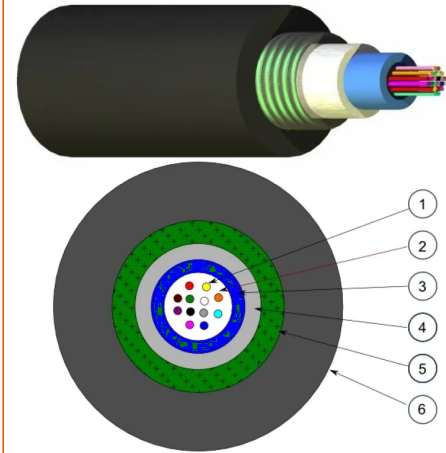

## STANDARDS

ANSI/TIA-568.3-D  
IEC 60332-1  
IEC 60332-3 Cat.C  
IEC 60793-2-10  
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# LANmark-OF UC Outdoor LSZH 2-24core APAC Region

## CHARACTERISTICS

### Construction characteristics

Armour type	Corrugated steel
Outer sheath	LSZH
Sheath colour	Black

### Mechanical characteristics

Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 3N.m
Crush resistance (IEC 60794-1-E3)	3000 N/100mm
Maximum pulling force (IEC 60794-1-2-E1)	1300 N

### Usage characteristics

Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	186.0 mm
Minimum static operating bending radius	93 mm
Storage temperature, range	-30...60 °C
Ambient installation temperature, range	0...40 °C

## Resources

### Documentation

LANmark-UC LSZH 24C APAC-Dimensional & Mechanical.xlsx xlsx — 9.32 KB [Download](#) ↓

N-number for LMOF UC LSZH-APAC\_2-24.xlsx xlsx — 9.65 KB [Download](#) ↓

## Product list

	Aginode ref.	Country ref.	Name
☞	N179.470	-	LANmark-OF UC LSZH 2core OM5 Black
☞	N179.472	-	LANmark-OF UC LSZH 6core OM5 Black
☞	N175.481	-	LANmark-OF UC LSZH 24core OM3 Black
☞	N174.471	-	LANmark-OF UC LSZH 4core SM G.652.D Black
☞	N175.471	-	LANmark-OF UC LSZH 4core OM3 Black
☞	N175.475	-	LANmark-OF UC LSZH 12core OM3 Black
☞	N175.470	-	LANmark-OF UC LSZH 2core OM3 Black
☞	N174.481	-	LANmark-OF UC LSZH 24core SM G.652.D Black
☞	N179.481	-	LANmark-OF UC LSZH 24core OM5 Black
☞	N179.471	-	LANmark-OF UC LSZH 4core OM5 Black
☞	N179.473	-	LANmark-OF UC LSZH 8core OM5 Black
☞	N179.475	-	LANmark-OF UC LSZH 12core OM5 Black
☞	N177.471	-	LANmark-OF UC LSZH 4core OM4 Black
☞	N177.481	-	LANmark-OF UC LSZH 24core OM4 Black
☞	N174.470	-	LANmark-OF UC LSZH 2core SM G.652.D Black
☞	N177.470	-	LANmark-OF UC LSZH 2core OM4 Black
☞	N174.472	-	LANmark-OF UC LSZH 6core SM G.652.D Black
☞	N174.473	-	LANmark-OF UC LSZH 8core SM G.652.D Black
☞	N174.475	-	LANmark-OF UC LSZH 12core SM G.652.D Black
☞	N175.472	-	LANmark-OF UC LSZH 6core OM3 Black
☞	N175.473	-	LANmark-OF UC LSZH 8core OM3 Black
☞	N177.472	-	LANmark-OF UC LSZH 6core OM4 Black
☞	N177.473	-	LANmark-OF UC LSZH 8core OM4 Black
☞	N177.475	-	LANmark-OF UC LSZH 12core OM4 Black

☞ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.