

Duct - Unitube cables

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed in outdoor installations.

Characteristics & Applications


- Easy installation due to the friction properties of the outer sheath
- Robust design
- Waterproof structure
- Halogen free

Fibre type

The cable is available with different fibre types.

Construction

- Jelly filled tube
- Reinforcement elements
- Low friction outer sheath



STANDARDS

IEC 60794

Duct - Unitube cables

CHARACTERISTICS

Construction characteristics

| | |
|-------------------|---------|
| Fiber optic type | SM |
| Construction type | Unitube |


Dimensional characteristics

| | |
|--------------------------|----|
| Number of tubes | 1 |
| Number of optical fibres | 24 |

Usage characteristics

| | |
|---------------------------------|----------------|
| Storage temperature, range | -40...70 °C |
| Installation type | Outdoor - Duct |
| Installation temperature, range | 0...40 °C |
| Bending factor when laying | 20 (xD) |

Resources

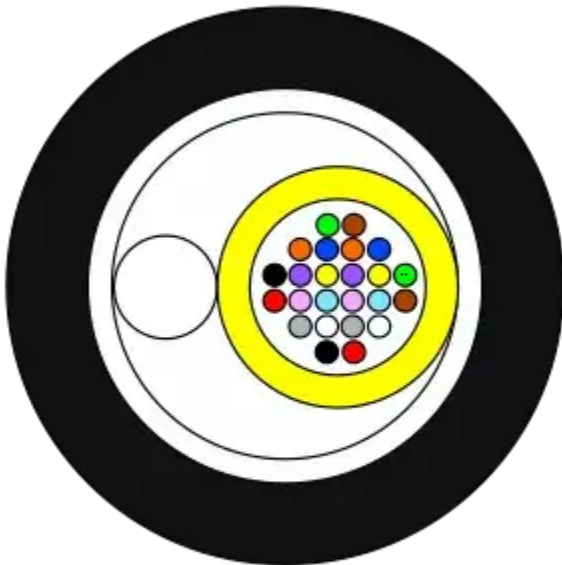

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Selling & delivery Information

Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count



YY = Fibre Type



FB = Frameries, Belgium (manufacturing place)

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

| Aginode ref. | Country ref. | Name | Armour type | Fiber optic type | Number of optical fibres | Number of tubes |
|---|--------------|--------------------------------|-------------|------------------|--------------------------|-----------------|
|  | - | Unitube Cable 1x24SM SP1647 | Glass yarns | SM | 24 | 1 |
|  10231297 | - | Unitube Cable 1x12SM SP1647 | Glass yarns | SM (G.652D) | 12 | 1 |

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.