

# Aerial Drop Cable

This cable is designed for subscriber connections in terminal part. It's suitable for aerial installation.

## Characteristics & Applications


- Compact cable
- All dielectric design
- UV resistant
- Waterproof structure
- Compatible with fitting accessories

## Fibre type

- The cable is available with different fibre types.

## Construction

- Tight or micro bundle design
- Reinforcements for aerial applications
- UV resistant outersheath

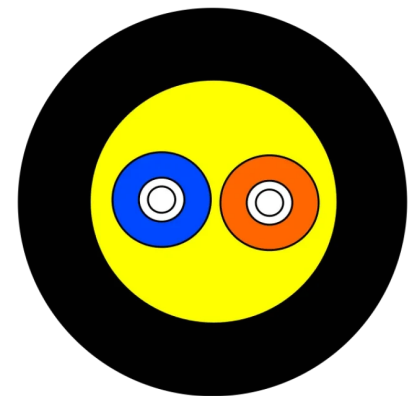

## STANDARDS

IEC 60794

# Aerial Drop Cable

## CHARACTERISTICS

### Construction characteristics

Fiber optic type	SM (G657.A2)
------------------	--------------

### Dimensional characteristics

Number of optical fibres	1
--------------------------	---

Number of optical fibres, range	1...4
---------------------------------	-------

## Selling & delivery Information

## Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XXxYY - FB - TN - metric





XX = Fibre Count



YY = Fibre Type

FB = Frameries, Belgium (manufacturing place)

TN = Traceability Number

## Product list

	Aginode ref.	Country ref.	Name	Fiber optic type	Number of optical fibres
	SP2069	-	Drop Cable Dual In/Outdoor 1xSM SP2069	SM (G657.A2)	1
		-	Drop Cable 2 fibres SP1952	SM	2
		-	Drop Cable 1 fibre SP1952	SM (G657.A2)	1
		-	Drop Cable 4 fibres SP1952	SM	4

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.