

Power To The Antenna D-CORE - Dca (N2XC2Y)

Power To The Antenna D-CORE is a shielded dual conductor power cable. It can be used as a DC power cable for the interconnexion between Base Unit and Radio Units on mobile towers or rooftops. The D-shape of the isolated conductors enables to reduce the diameter and weight of these cables with no negative impact on the properties. It also has best-in-class flexibility. The Dca fire euroclass allows indoor usage when needed.

Applications

- DC power cable 0.6/1.0 kV
- For indoor/outdoor applications
- Used on mobile phone towers or rooftops


Cable construction

1. Stranded Bare copper
2. Insulation (IEC 60811-1) XLPE - Blue/Brown or White/Red
3. Longitudinal aluminium tape
4. Tinned copper braid (Coverage US >65%)
5. Outer sheath: HFFR - Black - Dca (EN50575)

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation.

D-CORE Picture

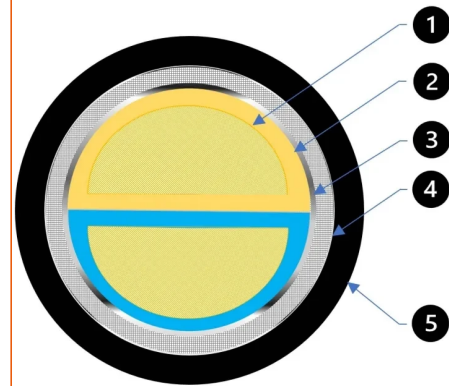

STANDARDS

- EN 50575
- IEC 60228
- IEC 60332-1
- IEC 60502-1

Power To The Antenna D-CORE - Dca (N2XC2Y)

CHARACTERISTICS

Construction characteristics

Outer sheath	LSZH
Wire colour	White - Red
Conductor material	Bare copper class 5

Dimensional characteristics

Outer Diameter	11 mm
Conductor cross-section	4 mm ²
Diameter over insulation, range	... mm

Electrical characteristics

Minimum insulation resistance	10 MOhm.km
Breakdown voltage Vcc, 5 min.	3500.0 V

Usage characteristics

RoHS conform	RoHS 2011/65/EU
Gases corrosivity	IEC 60754-1; IEC 60754-2
Operating temperature, range	-40...90 °C
Flame retardant	IEC 60332-1
Smoke density	EN/IEC 61034-2
U.V resistance	Yes
Packaging	Drum 500 m
Storage temperature, range	-40...50 °C
Bending factor when laying	8 (xD)
Bending factor when installed	4 (xD)

Resources

Documentation

Leaflet 4G and 5G_En_v2_1_1.pdf pdf — 7.02 MB [Download](#) ↓

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	Name	Wire colour	Conductor cross-section	Outer Diameter
☎	-	Power To The Antenna D-CORE - Dca 4mm ²	White - Red	4 (mm ²)	11 (mm)
☎	-	Power To The Antenna D-CORE - Dca 6mm ²	White - Red	6 (mm ²)	12 (mm)
☎	-	Power To The Antenna D-CORE - Dca 4mm ²	Blue - Brown	4 (mm ²)	11 (mm)
☎	-	Power To The Antenna D-CORE - Dca 6mm ²	Blue - Brown	6 (mm ²)	12 (mm)
☎	-	Power To The Antenna D-CORE - Dca 10mm ²	Blue - Brown	10 (mm ²)	13 (mm)
☎	-	Power To The Antenna D-CORE - Dca 16mm ²	Blue - Brown	16 (mm ²)	14.5 (mm)
☎	-	Power To The Antenna D-CORE - Dca 25mm ²	Blue - Brown	25 (mm ²)	17 (mm)

☎ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.