

# LANmark-OF TB LSZH 48-96C - APAC Region

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- All fibre grades
- Low Smoke Zero Halogene (LSZH)

## Description and Application

Aginode LANmark-OF TB Indoor fibre cable is designed for indoor applications. The fibre cable has 900µm tight buffered fibres with flame sheath around the transmission medium, and the 900µm sheath provides additional protection for the fibres. The cable is coated with aramid yarns as the strength member, and the outermost layer is coated with LSZH jacket. Bend Insensitive OM3/OM4 and SingleMode G.652.D and G.657.A1 are available.


The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

- Can be installed both vertically or horizontally
- Applicable as standard multimode and singlemode fibre
- Central FRP strength member
- Up to 8 sub tube, each contain 12c fibres
- LSZH Jacket
- Tight buffered fibre for easy stripping

## Construction

Legend accompanying the cross section drawing for 48-96core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. Subunit jacket
4. Central FRP Strength member
5. LSZH jacket materials

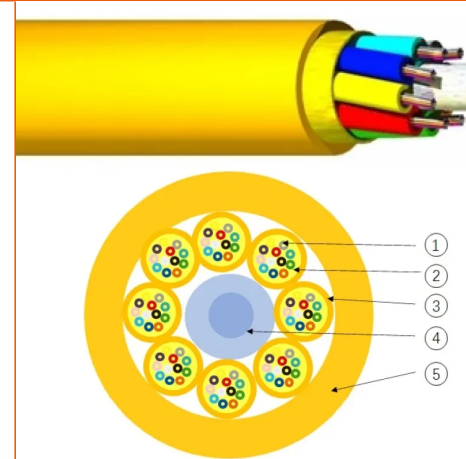

## STANDARDS

- ANSI/TIA-568-C.3
- IEC 60332-1
- IEC 60332-3-24 Cat.C
- IEC 60793-2-10
- ISO/IEC 11801

# LANmark-OF TB LSZH 48-96C - APAC Region

## CHARACTERISTICS

### Construction characteristics

Colour	Yellow
Fiber optic type	SM (G.652D)
Strength member	Central FRP
Number of tube layer 1	4

### Dimensional characteristics

Outer Diameter	14.8 mm
Number of optical fibres	48

### Mechanical characteristics

Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Maximum pulling force (IEC 60794-1-2-E1)	1500 N

### Usage characteristics

Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	296.0 mm
Minimum static operating bending radius	148 mm
Storage temperature, range	-30...70 °C
Installation temperature, range	0...40 °C

## Product list

	Aginode ref.	Country ref.	Name
☎	N174.037	-	LANmark-OF Tight Buffer LSZH SM G.652.D 48C YELLOW
☎	N177.043	-	LANmark-OF Tight Buffer LSZH OM4 72C AQUA
☎	N177.049	-	LANmark-OF Tight Buffer LSZH OM4 96C AQUA
☎	N174.049	-	LANmark-OF Tight Buffer LSZH SM G.652.D 96C YELLOW
☎	N174.043	-	LANmark-OF Tight Buffer LSZH SM G.652.D 72C YELLOW
☎	N175.049	-	LANmark-OF Tight Buffer LSZH OM3 96C ORANGE
☎	N175.037	-	LANmark-OF Tight Buffer LSZH OM3 48C ORANGE
☎	N177.037	-	LANmark-OF Tight Buffer LSZH OM4 48C AQUA
☎	N175.043	-	LANmark-OF Tight Buffer LSZH OM3 72C ORANGE

☎ = Make to order, 📦 = In Stock

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*