

# LANmark-OF UC Outdoor PE 2-24core APAC Region

Suitable for in ducts or direct burial

- Corrugated steel tape armour
- Gel filled tube
- Available to multimode and singlemode fibre
- Provides rodent protection
- Outer Jacket is HDPE

## Description and Application

Aginode LANmark-OF UC fibre cable is designed for outdoor applications. The construction is suitable for use outdoor for direct burial. It consists of a Unitube structure protected by corrugated steel tape armouring, the Unitube can hold up to 24C fibres. This provides rodent protection and high crush resistance. The cable has a HDPE outer jacket.


## Construction

Legend accompanying the cross section drawing:

1. Optical fibres (250 um)
2. Waterproof gel filling
3. Loose tube
4. Glass Yarn
5. Corrugated steel tape armour
6. HDPE outer jacket with UV resistant additive

## Characteristics

- Designed for termination by splicing
- Central loose tube design
- Corrugated steel protection
- Waterproof structure and UV-resistant
- Available in Multimode and Singlemode fibre
- Available from 2-24 fibres

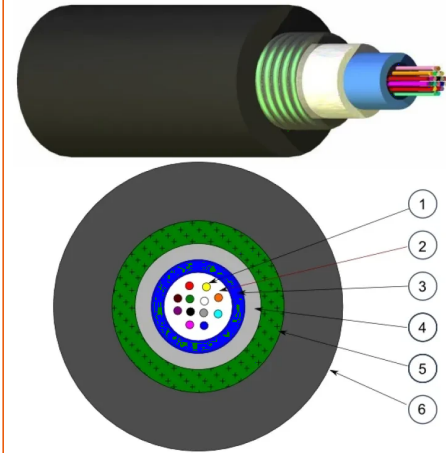

## STANDARDS

ANSI/TIA-568-C.3  
IEC 60793-2-10  
ISO/IEC 11801

# LANmark-OF UC Outdoor PE 2-24core APAC Region

## CHARACTERISTICS

### Construction characteristics

Armour type	Galvanized steel tapes
Outer sheath	HDPE
Sheath colour	Black

























### Mechanical characteristics



Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	1300 N
Crush resistance (IEC 60794-1-E3)	300 N/cm

### Usage characteristics

Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	164.0 mm
Minimum static operating bending radius	82 mm
Storage temperature, range	-30...60 °C
Ambient installation temperature, range	0...40 °C

## Product list

	Aginode ref.	Country ref.	Name
	N174.180	-	LANmark-OF UC PE 2core SM G.652.D Black APAC Region
	N174.181	-	LANmark-OF UC PE 4core SM G.652.D Black APAC Region
	N174.182	-	LANmark-OF UC PE 6core SM G.652.D Black APAC Region
	N174.183	-	LANmark-OF UC PE 8core SM G.652.D Black APAC Region
	N174.185	-	LANmark-OF UC PE 12core SM G.652.D Black APAC Region
	N174.191	-	LANmark-OF UC PE 24core SM G.652.D Black APAC Region
	N175.180	-	LANmark-OF UC PE 2core OM3 Black APAC Region
	N175.181	-	LANmark-OF UC PE 4core OM3 Black APAC Region
	N175.182	-	LANmark-OF UC PE 6core OM3 Black APAC Region
	N175.183	-	LANmark-OF UC PE 8core OM3 Black APAC Region
	N175.185	-	LANmark-OF UC PE 12core OM3 Black APAC Region
	N175.191	-	LANmark-OF UC PE 24core OM3 Black APAC Region
	N177.180	-	LANmark-OF UC PE 2core OM4 Black APAC Region
	N177.181	-	LANmark-OF UC PE 4core OM4 Black APAC Region
	N177.182	-	LANmark-OF UC PE 6core OM4 Black APAC Region
	N177.183	-	LANmark-OF UC PE 8core OM4 Black APAC Region
	N177.185	-	LANmark-OF UC PE 12core OM4 Black APAC Region
	N177.191	-	LANmark-OF UC PE 24core OM4 Black APAC Region
	N17A.180	-	LANmark-OF UC PE 2core SM G.657.A1 Black APAC Region
	N17A.181	-	LANmark-OF UC PE 4core SM G.657.A1 Black APAC Region
	N17A.182	-	LANmark-OF UC PE 6core SM G.657.A1 Black APAC Region
	N17A.183	-	LANmark-OF UC PE 8core SM G.657.A1 Black APAC Region
	N17A.185	-	LANmark-OF UC PE 12core SM G.657.A1 Black APAC Region
	N17A.191	-	LANmark-OF UC PE 24core SM G.657.A1 Black APAC Region

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.