
LANmark-OF TB OFNP 2-48C - APAC Region

- Tight Buffer Indoor optical fiber cables Indoor cable
- Aramid yarns for ease of installation
- Design for direct termination and splicing
- Up to 48 fibers and available in all fiber grades
- Bending Insensitive Fibers for SingleMode OS2 G.657.A1, OM3,OM4 cables

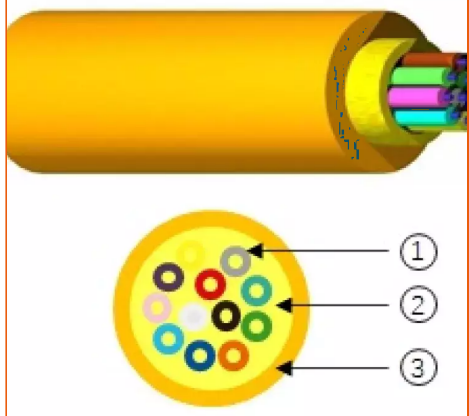

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

Application

The LANmark-OF Tight buffer Indoor has 900 um buffered fibres. This second
coating till 900 um provides additional protection of the fibres and facilitates the
handling when terminating the fibres in a patch panel. The easy strip tight buffer
design allows stripping the fibre over 10 cm in one action.
The LANmark-OF Tight buffer Indoor is most suitable for direct termination by
either anaerobic or hot melt connectors. The tight buffered fibres can also be
terminated with splicing of pigtails.
The dry structure of the LANmark-Of Tight Buffer Indoor allows both vertical and
horizontal installations. It complies with the indoor fibre requirements. The cables
can also be installed in a duct by pulling.

Construction

Legend accompanying the cross section drawing:

1. Optical fibre (900 um)
2. Aramid Yarns
3. Outer sheath in PVC OFNP material

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF TB OFNP 2-48C - APAC Region

CHARACTERISTICS

Construction characteristics	
Fiber optic type	SM (G657.A1)
Colour	Yellow
Dimensional characteristics	
Number of optical fibres	6
Outer Diameter	4.9 mm
Weight	25 g
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	460 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Usage characteristics	
Installation temperature, range	0...40 °C
Storage temperature, range	-30...70 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	98.0 mm
Minimum static operating bending radius	49 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name
	N17A.022NP	-	LANmark-OF Tight Buffer Indoor 6x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N17A.023NP	-	LANmark-OF Tight Buffer Indoor 8x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N17A.025NP	-	LANmark-OF Tight Buffer Indoor 12x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N17A.031NP	-	LANmark-OF Tight Buffer Indoor 24x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N17A.034NP	-	LANmark-OF Tight Buffer Indoor 36x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N17A.037NP	-	LANmark-OF Tight Buffer Indoor 48x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N175.020NP	-	LANmark-OF Tight Buffer Indoor 2x Multimode 50/125 BI OM3 Plenum, OFNP
	N175.034NP	-	LANmark-OF Tight Buffer Indoor 36x Multimode 50/125 BI OM3 Plenum, OFNP
	N175.037NP	-	LANmark-OF Tight Buffer Indoor 48x Multimode 50/125 BI OM3 Plenum, OFNP
	N177.034NP	-	LANmark-OF Tight Buffer Indoor 36x Multimode 50/125 BI OM4 Plenum, OFNP
	N177.037NP	-	LANmark-OF Tight Buffer Indoor 48x Multimode 50/125 BI OM4 Plenum, OFNP
	N174.034NP	-	LANmark-OF Tight Buffer Indoor 36x Singlemode 9/125 G.652.D Plenum, OFNP
	N174.037NP	-	LANmark-OF Tight Buffer Indoor 48x Singlemode 9/125 G.652.D Plenum, OFNP
	N17A.020NP	-	LANmark-OF Tight Buffer Indoor 2x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N17A.021NP	-	LANmark-OF Tight Buffer Indoor 4x Singlemode 9/125 G.657.A1 Plenum, OFNP
	N175.021NP	-	LANmark-OF Tight Buffer Indoor 4x Multimode 50/125 BI OM3 Plenum, OFNP
	N175.022NP	-	LANmark-OF Tight Buffer Indoor 6x Multimode 50/125 BI OM3 Plenum, OFNP
	N175.023NP	-	LANmark-OF Tight Buffer Indoor 8x Multimode 50/125 BI OM3 Plenum, OFNP
	N175.025NP	-	LANmark-OF Tight Buffer Indoor 12x Multimode 50/125 BI OM3 Plenum, OFNP
	N175.031NP	-	LANmark-OF Tight Buffer Indoor 24x Multimode 50/125 BI OM3 Plenum, OFNP
	N177.020NP	-	LANmark-OF Tight Buffer Indoor 2x Multimode 50/125 BI OM4 Plenum, OFNP
	N177.021NP	-	LANmark-OF Tight Buffer Indoor 4x Multimode 50/125 BI OM4 Plenum, OFNP
	N177.022NP	-	LANmark-OF Tight Buffer Indoor 6x Multimode 50/125 BI OM4 Plenum, OFNP
	N177.023NP	-	LANmark-OF Tight Buffer Indoor 8x Multimode 50/125 BI OM4 Plenum, OFNP
	N177.025NP	-	LANmark-OF Tight Buffer Indoor 12x Multimode 50/125 BI OM4 Plenum, OFNP
	N177.031NP	-	LANmark-OF Tight Buffer Indoor 24x Multimode 50/125 BI OM4 Plenum, OFNP
	N174.020NP	-	LANmark-OF Tight Buffer Indoor 2x Singlemode 9/125 G.652.D Plenum, OFNP
	N174.021NP	-	LANmark-OF Tight Buffer Indoor 4x Singlemode 9/125 G.652.D Plenum, OFNP
	N174.022NP	-	LANmark-OF Tight Buffer Indoor 6x Singlemode 9/125 G.652.D Plenum, OFNP
	N174.023NP	-	LANmark-OF Tight Buffer Indoor 8x Singlemode 9/125 G.652.D Plenum, OFNP
	N174.025NP	-	LANmark-OF Tight Buffer Indoor 12x Singlemode 9/125 G.652.D Plenum, OFNP
	N174.031NP	-	LANmark-OF Tight Buffer Indoor 24x Singlemode 9/125 G.652.D Plenum, OFNP

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.