


FLOORDROP

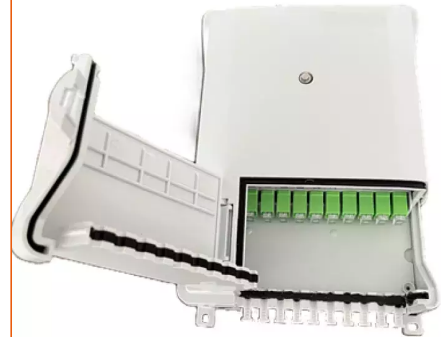

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

FLOORDROP is designed as the termination point of the Access Network on each floor of buildings with multiple households. It acts as a mutual connection hub, equipped with SC/APC connectors and pigtails. The unit supports pass-through distribution cables for easy integration into existing infrastructure.

STANDARDS

IEC 61753-1

It features a 24-fiber splice tray and a patch panel that accommodates up to 10 SC/APC adapters. For improved accessibility, the adapters can be slightly tilted upward. The enclosure is suitable for both indoor and outdoor environments and complies with IP65 protection standards. The box is compatible with passive optical components such as splitters and TAPs. Its port capacity makes it ideal for plug-and-play deployments, especially in TAP-based rollouts requiring fast and seamless installation. The demarcation between Access Network and Subscribers is made by means of 2 differentiated areas that can be secured independently. Optionally, the box can be delivered with a pre-installed cable tail to eliminate the need for field splicing. Branding options include a customized logo, which can be applied either as a sticker or engraved directly into the plastic casing.

FLOORDROP

CHARACTERISTICS

Construction characteristics

| | |
|------------------|----------|
| Fiber optic type | G.657 A2 |
|------------------|----------|

Dimensional characteristics

| | |
|-------|-------|
| Depth | 50 mm |
|-------|-------|

| | |
|--------|--------|
| Height | 235 mm |
|--------|--------|

| | |
|-------|--------|
| Width | 125 mm |
|-------|--------|

Mechanical characteristics

| | |
|-----------|---|
| IK Rating | 9 |
|-----------|---|

Usage characteristics

| | |
|----------------|----------|
| Fire resistant | UL 94 V0 |
|----------------|----------|

| | |
|----------------|-------|
| Watertightness | IP 65 |
|----------------|-------|

Product list

| Aginode ref. | Country ref. | Name |
|----------------------------------|--------------|--------------------------|
| FDSFLA10SCNANA00NA00NANANANANANA | - | FLOORDROP Splice |
| FDSFLA10SCNANA01SC01TCDCNANANANA | - | FLOORDROP TAP & Splitter |
| FDSFLA10SCNANA01SC00NASTNANANANA | - | FLOORDROP Splitter |

☎ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.