

Basement Splicing: BPI 144 & 288

BPI 288

Aginode Ref: 10171953

BPI equipped with 6 cassettes capacity 48 splices for 1 input cable and 6 output cables diameter 4 to 20mm.

The basement splicing box "BPI" is an interconnection solution dedicated to indoor distribution for FTTH networks.

BPI is designed for a maximum of 144 or 288 subscribers (splices) and adapted to configurations point to point or GPON.

Description

BPI allows splicing of a main cable to 6 or 12 secondary or drop cables by optimizing the density of connection (max. 144 or 288 splices).

Composition

BPI contains up to 3 (on BPI 48/96/144) or 6 (on BPI 288) splicing cassettes, each accommodating up to 48 splices. Each cassette can also receive splitters type SOD 250µm until 1x32 for PON applications (it is possible to integrate a splitter 1x64 using 2 cassettes).


A space under the cassettes makes it possible to coil fibers. The access to this space is possible thanks to the swivelling support of the cassettes.

The control of the bending radius is ensured by the presence of guiding accessories.

The boxes consist of

- a wall-mounted box with a cover
- 3 or 6 swivelling splicing cassettes
- a clamping system for cable

Main characteristics

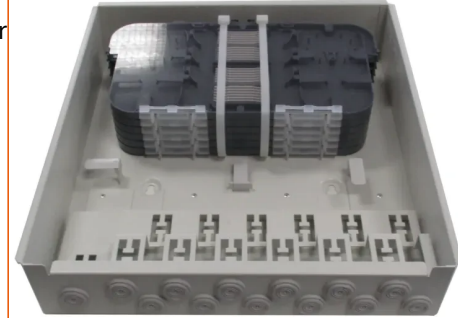

STANDARDS

Aginode specification
Orange/France Telecom

Fixing: wall-mounted with 4 screws (not provided)

Dimensions (WHD), in mm:

- BPI 48/96/144: 374 x 384 x 47
- BPI 288: 384 x 424 x 83

Material: Electro-galvanized steel 1mm thick painted color white / gray RAL 9002

Diameter of allowable cables: Ø4 à 20mm

- BPI 48/96/144, 1 input / 6 outputs
- BPI 288, 1 input / 12 outputs

BPI 288

Characteristics

Construction characteristics

| | |
|-------------|-----------------|
| Colour | RAL 9002 |
| Cable entry | From the bottom |
| Material | Steel |

Dimensional characteristics

| | |
|-----------------------|-----------|
| Depth | 83 mm |
| Height | 424 mm |
| Width | 384 mm |
| Number of cables | 13 |
| Number of cassettes | 6 |
| Cable Diameter, range | 4...20 mm |
| Splice number | 288 |


Mechanical characteristics


| | |
|-----------|----|
| IK Rating | 10 |
|-----------|----|

Usage characteristics

| | |
|------------------------------|-------------|
| Operating temperature, range | -25...70 °C |
| Installation type | Indoor |
| Watertightness | IP 54 |

Documentation

[Instruction manual BPI 144 pdf — 632.16 KB](#) Download 

[Instruction manual BPI 288 pdf — 503.91 KB](#) Download 

Selling & delivery Information

Unitary packaging, in a box