

LANmark-6A ULTIM Snap-In Connector

LANMARK-6A ULTIM SNAP-IN CONNECTOR CATEGORY 6A SCREENED

Aginode Ref: N420.960

- High speed Category 6A shielded connector
- Full compliance with TIA and ISO Category 6A cabling and connector standards
- Superior headroom by use of new engine technology
- Supports PoE++ Type 4 applications delivering up to 90W/71W (IEEE 802.3bt)
- Die-cast housing with 360° shielding offering excellent EMC and Alien Crosstalk performance
- Toolless termination enabling fast and easy installation
- Accepts solid and stranded wire from AWG26 to AWG22
- Easily re-installable
- 3rd party certified for connecting hardware, PoE++ compliance and Link and Channel
- Snap-In format convertible to keystone using optional adaptation clip
- Zero plastic packaging - pack of 24 connectors

Design

LANmark ULTIM is Aginode's newest Category 6A connector, manufactured and tested to the latest International, American and European cabling standards and designed to meet or exceed the stringent quality and performance criteria needed to support all applications up to 500 MHz, including 10 Gigabit Ethernet.


As a result of its ingenious IDC design, the LANmark ULTIM connector accepts both solid and stranded copper conductors, with wire sizes from AWG26 to AWG22, supporting all relevant cable types.

1.27 micron (50 microinch) gold plated front contacts offer superior mechanical durability, ensuring at least 2500 plug insertion cycles and supporting Power over Ethernet transmission up to 90W without degrading effect.

A full metal die-cast housing offers the LANmark ULTIM connector immunity against Alien Crosstalk and Electromagnetic Interferences.

Applications

In conjunction with LANmark-6A cable and ULTIM patch cords, the LANmark ULTIM connector supports all applications

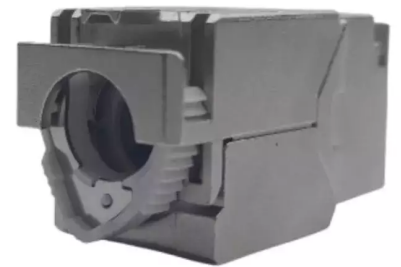

STANDARDS

ANSI/TIA-568.2-D
EN 50173
IEC 60603-7-51
IEEE 802.3af (PoE)
IEEE 802.3bt (PoE++)
IEEE 802.3at (PoE+)
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

specified up to 500 MHz including but not limited to:

- 10 BASE-T Ethernet
- 100 BASE-T Fast Ethernet
- 1000 BASE-T Gigabit Ethernet
- 2.5GBase-T 2.5 Gigabit Ethernet
- 5GBase-T 5 Gigabit Ethernet
- 10G BASE-T 10 Gigabit Ethernet IEEE 802.3
- PoE++ Type 4 (IEEE 802.3bt) including IEC 60512-9-3 (test 9c) and IEC 60512-99-002 (test 99b)
- Future Cat 6A and Class EA applications

Installation

The ULTIM connector is a one-piece design, with a wire organiser as sole accessory, guaranteeing infallible management of the twisted pairs.

Simply closing the connector top and bottom covers ensure fast and effortless IDC termination without the need for any tools.

The installation finishes with laying the cable drain wire in its place and fastening the cable clamp to establish the earthing and bonding.

The ULTIM connector, with its Snap-In format, is compatible with all LANmark Snap-In structural hardware, such as:

- LANmark Snap-In patch panels (fixed, sliding and angled)
- LANmark 6-port and 12-port Zone Distribution Boxes
- LANmark Snap-In outlet modules (UK, US, European and German style)

The connector is supplied in a plastic-free packaging of 24.

Performance

Aginode's LANmark ULTIM connector meets or exceeds the requirements for Category 6A connecting hardware as described in ISO/IEC 11801, IEC 60603-7-51 and ANSI/TIA 568.2-D.

In conjunction with LANmark-6A cable it supports all 2, 3 and 4 connector models as specified in these standards, as well as very short link and channel configurations, which make it also an ideal solution for Data Centres, avoiding cable length excess in the racks.

In addition, extended channel distances can be supported, including PoE, according to the application used.

Independent lab certification

The ULTIM connector is certified by 3P for connecting hardware, PoE++ compliance and various Link and Channel configurations.

Guarantees

Links and Channels built with LANmark-6A (or higher) cable and ULTIM connector and cords are guaranteed to meet or exceed the requirements of the above mentioned standards.

A full Class EA System Warranty for a period of 25 years, including parts, installation, Channel performance and application support, can be obtained, following the Aginode LANmark Warranty application process.

Traceability codes on connector and packaging ensure quality validation.

Watch the video for an overview...

Video file

Installation videos

How to terminate a Aginode LANmark-6A ULTIM screened connector onto a **S/FTP cable**



How to terminate a Aginode LANmark-6A ULTIM screened connector onto a **FXTTP cable**



How to uninstall a Aginode LANmark-6A ULTIM screened connector



All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-6A ULTIM Snap-In Connector Category 6A Screened

Characteristics

Construction characteristics

| | |
|----------------|------------------------|
| Connector type | RJ45 and Tool-less IDC |
| Screen | Yes |


Dimensional characteristics

| | |
|--------|---------|
| Depth | 35.2 mm |
| Height | 19.5 mm |
| Width | 16.8 mm |

Usage characteristics

| | |
|--------------------|------------|
| Category | Cat. 6A |
| Component function | Connector |
| Packaging | box 24 |
| Range | LANmark-6A |

Documentation

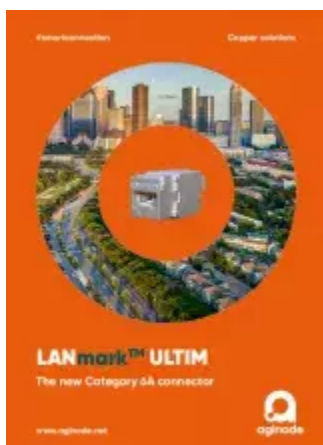

PDF - 2.31 MB

LANmark ULTIM - CE connector leaflet

[Download](#)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

3P Certificate ULTIM Connecting hardware 2026.pdf pdf — 255.5 KB Download [↓](#)

3P Certificate ULTIM PoE 2026.pdf pdf — 257.2 KB Download [↓](#)

3P certificate ULTIM Link with FFTP cable pdf — 109.53 KB Download [↓](#)

3P certificate ULTIM Channel with FFTP cable pdf — 109.74 KB Download [↓](#)

3P certificate ULTIM Channel with FXTP cable.pdf pdf — 109.74 KB Download [↓](#)

3P certificate ULTIM Channel with F1UTP cable pdf — 109.71 KB Download [↓](#)

Installation Instruction sheet ULTIM N420.960.pdf pdf — 4.65 MB Download [↓](#)

Design Guidelines LANmark-6A ULTIM system

Design Guidelines

LANmark-6A ULTIM
Cabling System

February 2025
Version 1.2



PDF - 684.21 KB

Design Guidelines LANmark-6A ULTIM Cabling System

Download [↓](#)