

B-LITE LT - Unitube cables

MICROCABLE 1X4 G657A1 SP1707 B-LITE (N)

Aginode Ref: 14500878

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed designed for outdoor installation by blowing in microduct.

Characteristics & Applications


- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Aramid yarns reinforcement
- All dielectric design
- Waterproof structure

Construction

- Jelly filled dual wall tube
- Aramid yarns
- Low coefficient of friction sheath

Marking :

**B-LITE - Aginode - SP1707 - FIBRE OPTIC CABLE -
4xSMG657A - TN - CCCCCM**

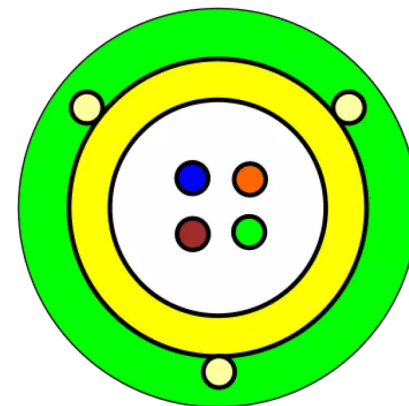

STANDARDS

EN 187000
IEC 60794

Microcable 1x4 G657A1 SP1707 B-LITE (N)

Characteristics

Construction characteristics

Armour type	Aramid yarn
Colour	Green
Construction type	Unitube
Fiber optic type	SM (G657.A1)
Metal free	Yes
Outer sheath	PE-HD

Dimensional characteristics

Approximate weight	6 kg/km
Nominal outer diameter (mm)	2.5 mm
Number of optical fibres	4
Number of tubes	1

Mechanical characteristics

Crush resistance (IEC 60794-1-E3)	200 N/cm
Maximum admissible traction load (Tm)	15 daN
Maximum tensile load during service (Tl)	10.0 daN

Usage characteristics

Bending factor when laying	20 (xD)
Installation temperature, range	0...40 °C
Installation type	Outdoor - Microduct blowable
Operating temperature, range	-25...70 °C
Storage temperature, range	-40...70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.