
UPSKY™ preterminated cable singlemode & multimode

UPSKY™ PRETERMINATED CABLE 24 LC (16MM + 8SM) / 100M

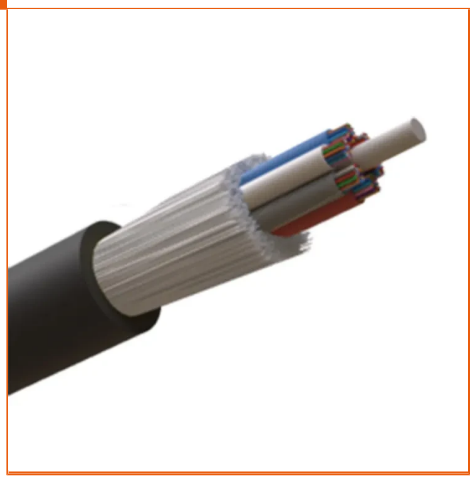

Aginode Ref: 13200650

- Single-mode and multimode fibres in the same cable
- 24/48/72 fibres
- Hight mechanical resistance
- Supplied with UPSKY™ BOX L/XL connector block

Design

- Small diameter cable
- Dielectric and non-polarized
- UV-resistant
- Waterproof

Installation

- Indoor and outdoor
- LSZH-FR

Environmentally friendly

- Eco-designed
- PEP Eco Passport
- Available upon request

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

UPSKY™ preterminated cable 24 LC (16MM + 8SM) / 100m

Characteristics

Construction characteristics	
Colour	Black
Outer sheath	LSZH-FR (Dca s2 do)
Construction type	Multitube with central strenght member
Fibre optic type	SM G657 A2 or OM3
Additional strength member	Glass yarn
Dimensional characteristics	
Approximate weight	85 kg/km
Number of optical fibres	24
Cable Diameter	8.9 mm
Mechanical characteristics	
Mechanical resistance to impacts	5N.m
Crush resistance	100daN/cm kg/cm
Maximum Pulling Tension	200daN (80 daN) kN
Usage characteristics	
Minimum static operating bending radius	178 mm
Storage temperature, range	-40...70 °C
Installation type	Indoor/Outdoor
Installation temperature, range	0...40 °C
Operating temperature flexing, range	30...60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.