LANmark-OF Splice Cassettes

LANMARK-OF COVER FOR SPLICE TRAY N890L.095

Aginode Ref: N890L.097

- Splice cassette cover
- Small Splice cassette





STANDARDS

ISO/IEC 11801

Family of patch panel accessories for termination of cable when using fusion splicing techniques.
The cassette protects the fusion splices and holds them in position.
The splice cassette with heatshrink protectors can be used for both 250 and 900 µm coated fibres. Hence these cassettes are compatible with LANmark-OF Tight Buffer, Loose Tube and Micro-Bundle cables. Splicing with heat shrink protectors can also be used for both LANmark-OF Maxistrip and Tight Buffer Pigtails.
These cassettes have 12 splice positions, can hold 12 or 24 fibers.
The Aginode fibre panels can hold up to 4 splice cassettes and only the top splice cassette needs a cover(N890L.097).
The cassette (N890L.095) have 12 splice positions, can hold 12 or 24 fibers, and it compatible with the LANmark-OF Snap-In panels (N441.303 and N441.304) and the LANmark-OF ZDboxes (N521.630 and N521.612).
Reference installation dimension as below:

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

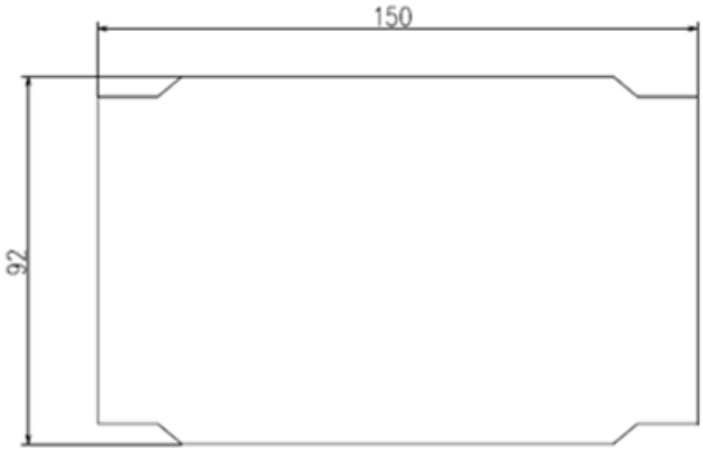

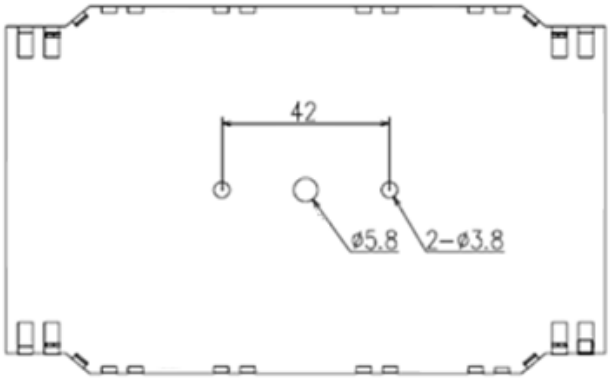

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.