

# IN AND OUT IP Cable

- Camera IP video cable
- Cable compliant with IEC61156-6 CAT6A (under a distance of 60m for the VIP)
- For systems compliant with EA class according to ISO/IEC 11801 & EN 50173 (under a distance of 60m for the VIP)
- UV and humidity resistant and LSZH
- Flame retardant according to EN50575:2014+A1:2016 and IEC 60332-1
- Shielded cable for EMC performance
- High tensile strength for outdoor installation
- Compatible POE, POE+ and UPOE
- RoHS EC Directive compliant
- Compliant with European Reach regulation

## Application

The shielded IP cables with In&Out outer jacket are the very high end IP solution offering from Aginode. The special jacket guarantee a very good UV and humidity resistance and also a LSZH compliance.

Cables are available in 2 versions : AWG26 authorizing a direct connection on RJ45 plugs and AWG23 dedicated for RJ45 connector termination.



Manufactured in accordance with ISO IEC 61156-5 and -6 transmission requirements, the In&Out cables are the best choice to support 10Gigabit Ethernet, smart city and smart building application in channel configurations and direct attached such as IP video security applications, outdoor and indoor wifi access point, industrial and urban automation systems.

## Construction

1. Conductor: solid bare copper (AWG26 or AWG23)
2. Insulation : Polyethylen (EN 50290-2-23) - Two insulated conductors twisted to a pair
3. Screen: ALU/PET on each pair. Alu outside - 4/2 laid up together
4. Tinned copper braid
5. Outer Jacket : In&Out Eca (EN50575)

## Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheath of the cable

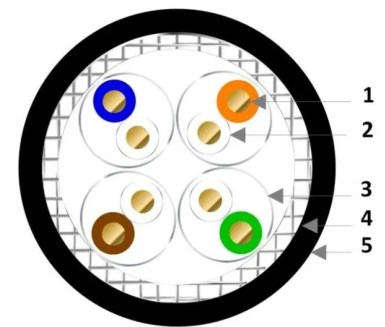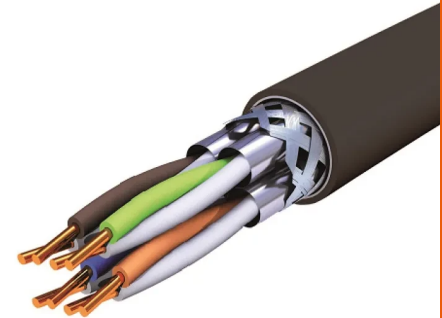

## STANDARDS

EN 50173  
EN 50288  
EN 50575  
IEC 61156-6  
ISO/IEC 11801

is made of halogen free material (IEC 60754-1 / EN 50267-2-1),  
with limited fumes emissions (IEC 61034-1/2 / EN 50268-1/2)  
and no acid gas emissions in case of fire (IEC 60754-2 / EN  
50267-2-2).

Aginode measure the environmental impact of each cable.  
Upon request the PEP Ecopassport or the Eco Material  
Declaration could be available.

# IN AND OUT IP Cable

## CHARACTERISTICS

### 结构特性

|      |          |
|------|----------|
| 外护套  | In & out |
| 护套颜色 | 黑        |

### 尺寸特性

|     |   |
|-----|---|
| 线对数 | 4 |
|-----|---|

### 传输特性

|           |             |
|-----------|-------------|
| 最大延时典型值   | 450 ns/100m |
| 导体最大延时典型值 | 536 ns/100m |
| 线对最大延时典型值 | 540 ns/100m |

### 使用特性

|         |             |
|---------|-------------|
| 耐气候性    | 优异          |
| 阻燃 - 火焰 | IEC 60332-1 |
| 包装      | Drum 500 m  |

## Product list

|   | Aginode ref. | Country ref. | Name                                   | 包装         |
|---|--------------|--------------|--|------------|
| ☐ | 13200561     | -            | AGINODE CAT6A U/FTP 4P In/Out Eca 500m | Drum 500 m |
| ☐ | 10251534     | -            | VIP CABLE S/FTP 4P In&Out Eca 305m     | Box 305 m  |

☎ = Make to order, ☐ = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.