

240 系统

安捷诺光纤线槽系统为光缆和电线提供专用通道，保护它们免受意外损坏。该系统为数据中心提供了一个灵活、大容量的封闭解决方案，易于安装和重新配置，以满足未来需求。

安捷诺 FIBREROUTE 240 系统为数据中心设计中的 MD 布线通路提供了符合 ISO/IEC 11801-5、EN 50173-5 或 EN 50600-2-4 标准的基本构件。

全面保护：

通道上特殊设计的刚性表面可保护脆弱的光纤链路，适配器可在通道和/或适配器之间提供无缝连接，从而控制光纤跳线和 MPO 线槽的弯曲半径。


快速安装：

通过使用配件和适配器连接不同通道，可实现灵活安装。无需焊接：所有部件均可使用无托紧固件连接在一起。

固定和支持装置可用于墙壁安装、天花板悬挂、地板下、机架安装和数据中心内的其他结构。

访问方便：



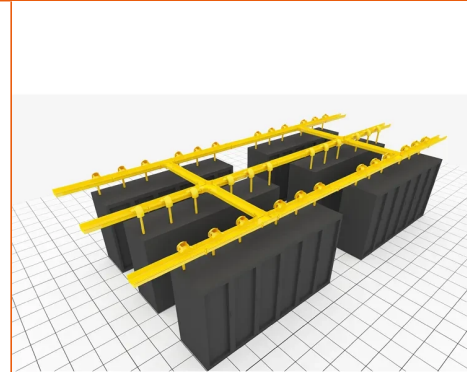











从一堆水平的铜线束中分离出来后，移动/添加/更改光纤配线非常方便。通过使用各种尺寸的接头和 Tees，可轻松实现不同尺寸的未来扩展和互连。





STANDARDS

EN 50173-5
ISO/IEC 24764

Product list

	Aginode ref.	Country ref.	Name
	N350.240FC00P	-	FIBREROUTE 240mm(9.45 inch) Channel
	N350.240FC10P	-	FIBREROUTE 240mm(9.45 inch) Channel Cover
	N350.240FA11A	-	FIBREROUTE 240mm(9.45 Inch) Elbow Cover
	N350.240FA01A	-	FIBREROUTE 240mm(9.45 inch) Elbow
	N350.240FA02A	-	FIBREROUTE 240mm(9.45 inch) Equal Tee
	N350.240FA12A	-	FIBREROUTE 240mm(9.45 inch) Equal Tee Cover
	N350.240FA03A	-	FIBREROUTE 240mm(9.45 inch) Equal Cross
	N350.240FA21A	-	FIBREROUTE 240mm(9.45 Inch) 45° Vertical Internal Bend
	N350.240FA31A	-	FIBREROUTE 240mm(9.45 Inch) 45° Vertical Internal Bend Cover
	N350.240FA32A	-	FIBREROUTE 240mm(9.45 Inch) 45° Vertical External Bend Cover
	N350.240FA22A	-	FIBREROUTE 240mm(9.45 Inch) 45° Vertical External Bend
	N350.240FC03A	-	FIBREROUTE 240mm(9.45 Inch) End-cap
	N350.240FA04A	-	FIBREROUTE 240mm(9.45 inch) Universal Transition
	N350.240FC01A	-	FIBREROUTE 240mm(9.45 inch) In-line Connector

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.