
Duct - Unitube cables

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed in outdoor installations.



STANDARDS

IEC 60794

Characteristics & Applications

- Easy installation due to the friction properties of the outer sheath
- Robust design
- Waterproof structure
- Halogen free

Fibre type

The cable is available with different fibre types.

Construction

- Jelly filled tube
- Reinforcement elements
- Low friction outer sheath


All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Duct - Unitube cables

CHARACTERISTICS

结构特性	
光纤类型	SM
结构类型	Unitube
尺寸特性	
管数	1
光纤数	24
使用特性	
存储温度范围	-40...70 °C
安装类型	户外 - 管道
Installation temperature, range	0...40 °C
敷设时弯曲系数	20 (xD)

Resources

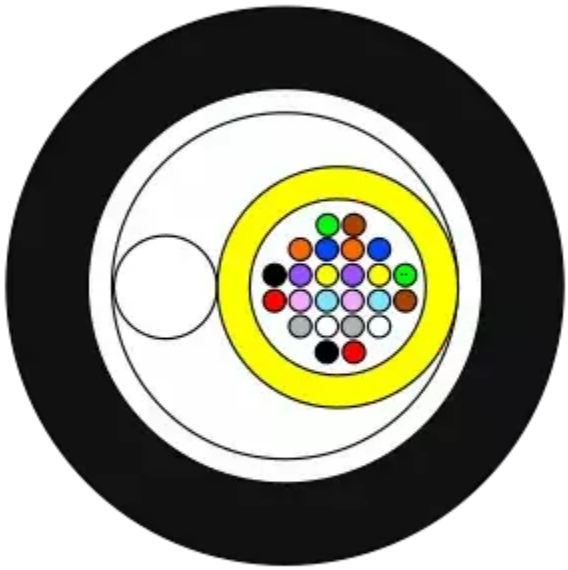

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

销售和交付信息

Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count
YY = Fibre Type
FB = Frameries, Belgium (manufacturing place)
TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	铠装类型	光纤类型	光纤数	管数
		-	Unitube Cable 1x24SM SP1647	玻璃纤维丝	SM	24	1
	10231297	-	Unitube Cable 1x12SM SP1647	玻璃纤维丝	SM (G.652D)	12	1

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.