

Riser - Microbundle cables Cca

Multi Micro-bundles cable - up to 144 fibres

These multi micro-bundles cables are designed for indoor installation and offer easy extraction of the units as a riser cable

These cables have an outstanding fire behaviour.

These cable can be operated under a large temperature range.

Design

The cables have a radial strengthmember design and contains up to 24 units with a maximum of 144 fibres. They are available in modularity 2, 4, 6 and 12.

The pullback can be operated on 6m.

Fibre type

These cables are available with singlemode and multimode fibres.

Technical performances


The multibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with other colours could generate colour fading.

Euroclass

Cca s1 d0 a1

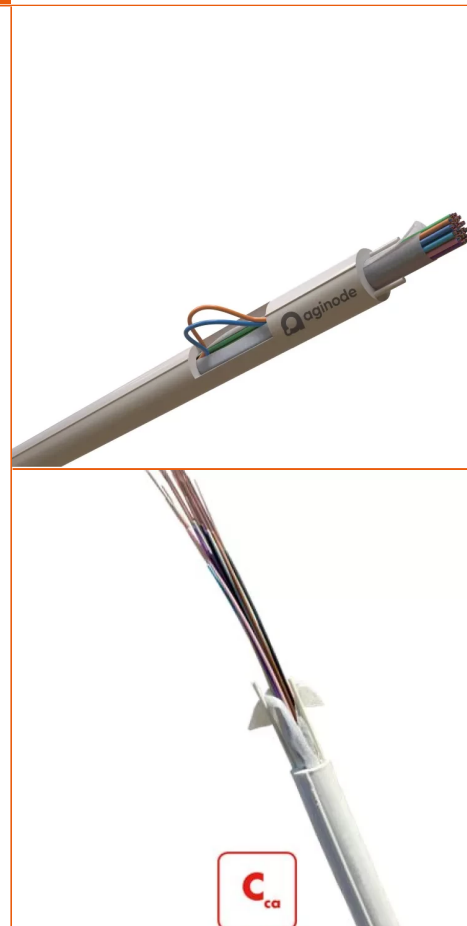

STANDARDS

EN 50399
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Riser - Microbundle cables Cca

CHARACTERISTICS

结构特性

颜色	象牙白
光纤类型	SM (G657.A2)
外护套	低烟无卤
无卤	IEC 60754-1
不含金属	Yes
加强构件	Embedded FRP
结构类型	多束管

尺寸特性

管数	2
光纤数	24
直径范围	... mm
光纤数, 范围	24...144

机械特性

机械耐冲击性能	10次冲击/ N.M
耐挤压 (IEC 794-1-E3)	100 N/cm

使用特性

操作温度, 范围	-20...60 °C
阻燃 - 火焰	IEC 60332-1
烟密度	IEC 61034-2
存储温度范围	-40...60 °C
安装类型	室内
Installation temperature, range	0...40 °C

销售和交付信息

Standard Marking

Aginode - FIBRE OPTIC CABLE - MB-C LSZH Cca s1 d0 a1 SPXXXX - XXxYY - FB - TN - metric

XX = Fibre Count

YY = Fibre Type

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.


FB = Frameries, Belgium (manufacturing place)

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	Name	颜色	光纤类型	光纤数	管数	耐挤压 (IEC 794-1-E3)
	-	MB-Cca LSZH 2x12SM G657A2 SP1898	象牙白	SM (G657.A2)	24	2	100 (N/cm)
	-	MB-Cca LSZH 24x4SM G657A1 SP1900 IV	象牙白	SM (G657.A1)	96	24	150 (N/cm)
	-	MB-Cca LSZH 24x2SM G657A1 SP1899 IV	象牙白	SM (G657.A1)	48	24	150 (N/cm)
 10548535	-	MB-Cca LSZH 4x12 SM G657A2 SP1898 IV	象牙白	SM (G657.A2)	48	4	150 (N/cm)
	-	MB-Cca LSZH 24x6SM G657A1 SP1893 IV	象牙白	SM (G657.A1)	144	24	100 (N/cm)
	-	MB-Cca LSZH 4x12SM G657A2 SP1898	象牙白	SM (G657.A2)	48	4	100 (N/cm)
	-	MB-Cca LSZH 8x12SM G657A2 SP1898	象牙白	SM (G657.A2)	96	8	100 (N/cm)
	-	MB-Cca LSZH 12x12SM G657A2 SP1898	象牙白	SM (G657.A2)	144	12	100 (N/cm)
 10567548	-	MB-Cca LSZH 4x6SM G657A2 SP1893	象牙白	SM (G657.A2)	24	4	150 (N/cm)
	-	MB-Cca LSZH 8x6SM G657A2 SP1893	象牙白	SM (G657.A2)	48	8	150 (N/cm)
	-	MB-Cca LSZH 12x6SM G657A2 SP1893	象牙白	SM (G657.A2)	72	12	150 (N/cm)
 10567581	-	MB-Cca LSZH 24x6SM G657A2 SP1893	象牙白	SM (G657.A2)	144	24	150 (N/cm)
	-	MB-Cca LSZH 2x6SM G657A2 SP1893	象牙白	SM (G657.A2)	12	2	150 (N/cm)

 = Make to order,  = In Stock