

AGINODE PTTA D-CORE - Eca

Power To The Antenna D-CORE is a shielded dual conductor power cable. It can be used as a DC power cable for the interconnexion between Base Unit and Radio Units on mobile towers or rooftops. The D-shape of the isolated conductors enables to reduce the diameter and weight of these cables with no negative impact on the properties. It also has best-in-class flexibility.

Applications

- Power cable 0.6/1.0 kV
- For indoor/outdoor applications
- Used on mobile phone masts


Cable construction

1. **Bare conductor strand - Class 5**
2. **Insulation (IEC 60811-1)XLPE**
3. **Longitudinal ALU/PET tape**
4. **Tinned copper braid (Coverage US >65%)**
5. **Outer sheath: Eca**
HFFR - Black

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation.

D-CORE Picture

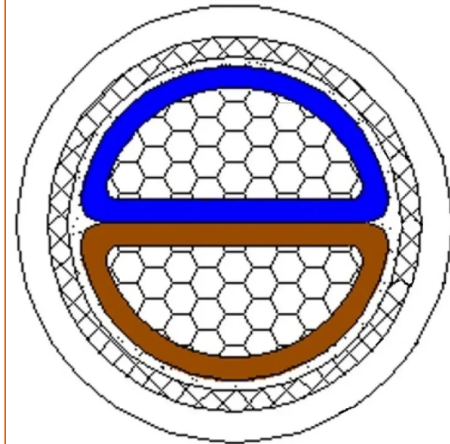

UPSKY™

STANDARDS

IEC 60332-1
IEC 60502-1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

AGINODE PTTA D-CORE - Eca

CHARACTERISTICS

结构特性

外护套	低烟无卤
电线颜色	白 - 红
导体材料	Bare copper class 5

尺寸特性

近似重量	676 kg/km
外径	17 mm
导线截面	25 mm ²

电气特性

Minimum insulation resistance	10 MOhm.km
Breakdown voltage Vcc, 5 min.	3500.0 V

使用特性

阻燃 - 火焰	IEC 60332-1
敷设时弯曲系数	8 (xD)
安装时弯曲系数	4 (xD)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	近似重量	导线截面	外径
☎	13200154	-	AGINODE D-CORE 2x25 BA+RG LSZH Eca 500M	676 (kg/km)	25 (mm ²)	17 (mm)
☎	13200079	-	AGINODE D-CORE 2x4 BA+RG LSZH Eca 500M	177 (kg/km)	4 (mm ²)	11 (mm)
☎	13200080	-	AGINODE D-CORE 2x6 BA+RG LSZH Eca 500M	223 (kg/km)	6 (mm ²)	12 (mm)
☎	13200151	-	AGINODE D-CORE 2x10 BA+RG LSZH Eca 500M	320 (kg/km)	10 (mm ²)	13 (mm)
☎	13200162	-	AGINODE D-CORE 2x16 BA+RG LSZH Eca 500M	430 (kg/km)	16 (mm ²)	14.5 (mm)

☎ = Make to order, 📦 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.