

Cat.6 450 F/UTP LSZH Dca

- Complies to latest Cat 6 standard version
- Supports Class E applications
- Cable tested up to 450 MHz
- Flame retardant according to EN50575:2014+A1:2016 and IEC 60332-1
- Global screen for EMC performance
- Compatible POE, POE+ and UPOE
- RoHS EC Directive compliant
- Compliant with European Reach regulation
- N'Roll and MOBIWAY™ compatible

Application


F/UTP Category 6 cables are the standard offering from Aginode. Manufactured in accordance with ISO IEC 61156-5 requirements, the F/UTP cable is the best choice to support all Class E applications like Ethernet, Fast Ethernet, Gigabit Ethernet, ... Cat 6 F/UTP cables are suitable for basic voice and data installations up to 250 MHz. Aginode Cat.6 cables, combined with a similar class of performance connectivity, are suitable for voice and data installations according to ISO/IEC 11801, EN 50173 and TIA/EIA 568 standards.

Construction

1. Conductor: solid bare copper
2. Insulation : Polyethylen (EN 50290-2-23) - Two insulated conductors twisted to a pair
3. Cross filler - 4/2 laid up together
4. Tinned copper drain wire
5. Screen: ALU/PET foil - Alu inside
6. Outer Jacket : LSZH - Dca

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheath of the cable is made of halogen free material (IEC 60754-1 / EN 50267-2-1), with limited fumes emission (IEC 61034-1/2 / EN 50268-1/2) and no acid gas emission in case of fire (IEC 60754-2 / EN 50267-2-2).

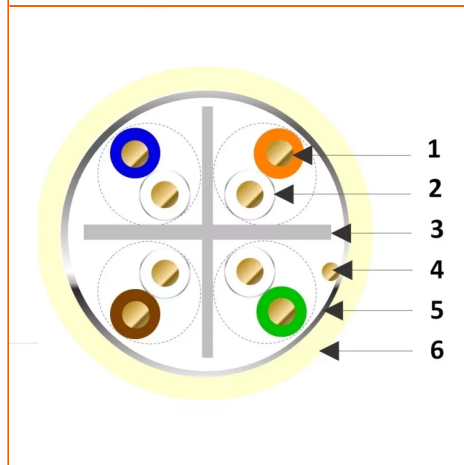

STANDARDS

- EN 50173
- EN 50288
- EN 50575
- IEC 60332-1
- IEC 61156-5
- ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Aginode measure the environmental impact of each of the cable. Upon request the PEP Ecopassport or the Eco Material Declaration could be available.

Cat 6 450 F-UTP TRANSMISSION CHARACTERISTICS

CAT.6 450 F/UTP TRANSMISSION CHARACTERISTICS

Values at 20°C

Frequency (MHz)	S/T	4	10	16	20	100	200	250	350	450
Attenuation max. (dB/100m)	Standard	3.8	6.0	7.6	8.5	19.9	29.1	33.0	-	-
	Typical	3.6	5.5	6.9	7.7	17.6	25.4	28.6	34.4	39.5
NEXT min. (dB)	Standard	66.3	60.3	57.2	55.8	45.3	40.8	39.3	-	-
	Typical	80.5	72.7	68.8	66.9	53.3	47.4	45.5	42.7	40.5
PSNEXT min. (dB)	Standard	63.3	57.3	54.2	52.8	42.3	37.8	36.3	-	-
	Typical	77.5	69.7	65.8	63.9	50.3	44.4	42.5	39.7	37.5
ACRF min. (dB)	Standard	56.0	48.0	43.9	42.0	28.0	22.0	20.0	-	-
	Typical	85.5	76.3	71.5	69.3	53.1	46.1	43.9	40.5	38.0
PSACRF min. (dB)	Standard	53.0	45.0	40.9	39.0	25.0	19.0	17.0	-	-
	Typical	82.5	73.3	68.5	66.3	50.1	43.1	40.9	37.5	35.0
Return Loss min. (dB)	Standard	23.0	25.0	25.0	25.0	20.1	18.0	17.3	-	-
	Typical	27.0	29.0	29.0	29.0	24.5	22.5	21.9	20.9	20.2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Cat.6 450 F/UTP LSZH Dca

CHARACTERISTICS

结构特性

外护套	低烟无卤
-----	------

护套颜色	象牙白
------	-----

尺寸特性

线对数	4
-----	---

使用特性

阻燃 - 火焰	IEC 60332-1
---------	-------------

包装	Coil 100 m
----	------------

Product list

	Aginode ref.	Country ref.	Name	护套颜色	线对数	包装
	10269868	-	AGINODE C6 450 F/UTP LSZH Dca 4P 100m IVOIRY	象牙白	4	Coil 100 m
	10269942	-	AGINODE C6 450 F/UTP LSZH Dca 4P 500m IVOIRY	象牙白	4	Drum 500 m
	10269943	-	AGINODE C6 450 F/UTP LSZH Dca 2x4P 500m IVOIRY	象牙白	8	Drum 500 m
	10272115	-	AGINODE C6 450 F/UTP LSZH Dca 4P 1000m IVOIRY	象牙白	4	Drum 1000 m
	10272113	-	NEX C6 450 F/UTP LSZH Dca 4P 305 RIB IVOIRY	象牙白	4	Reel in a box
	10272125	-	AGINODE C6 450 F/UTP LSZH Dca 4P 200m RCH IVOIRY	象牙白	4	N'Roll 200 m

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.